



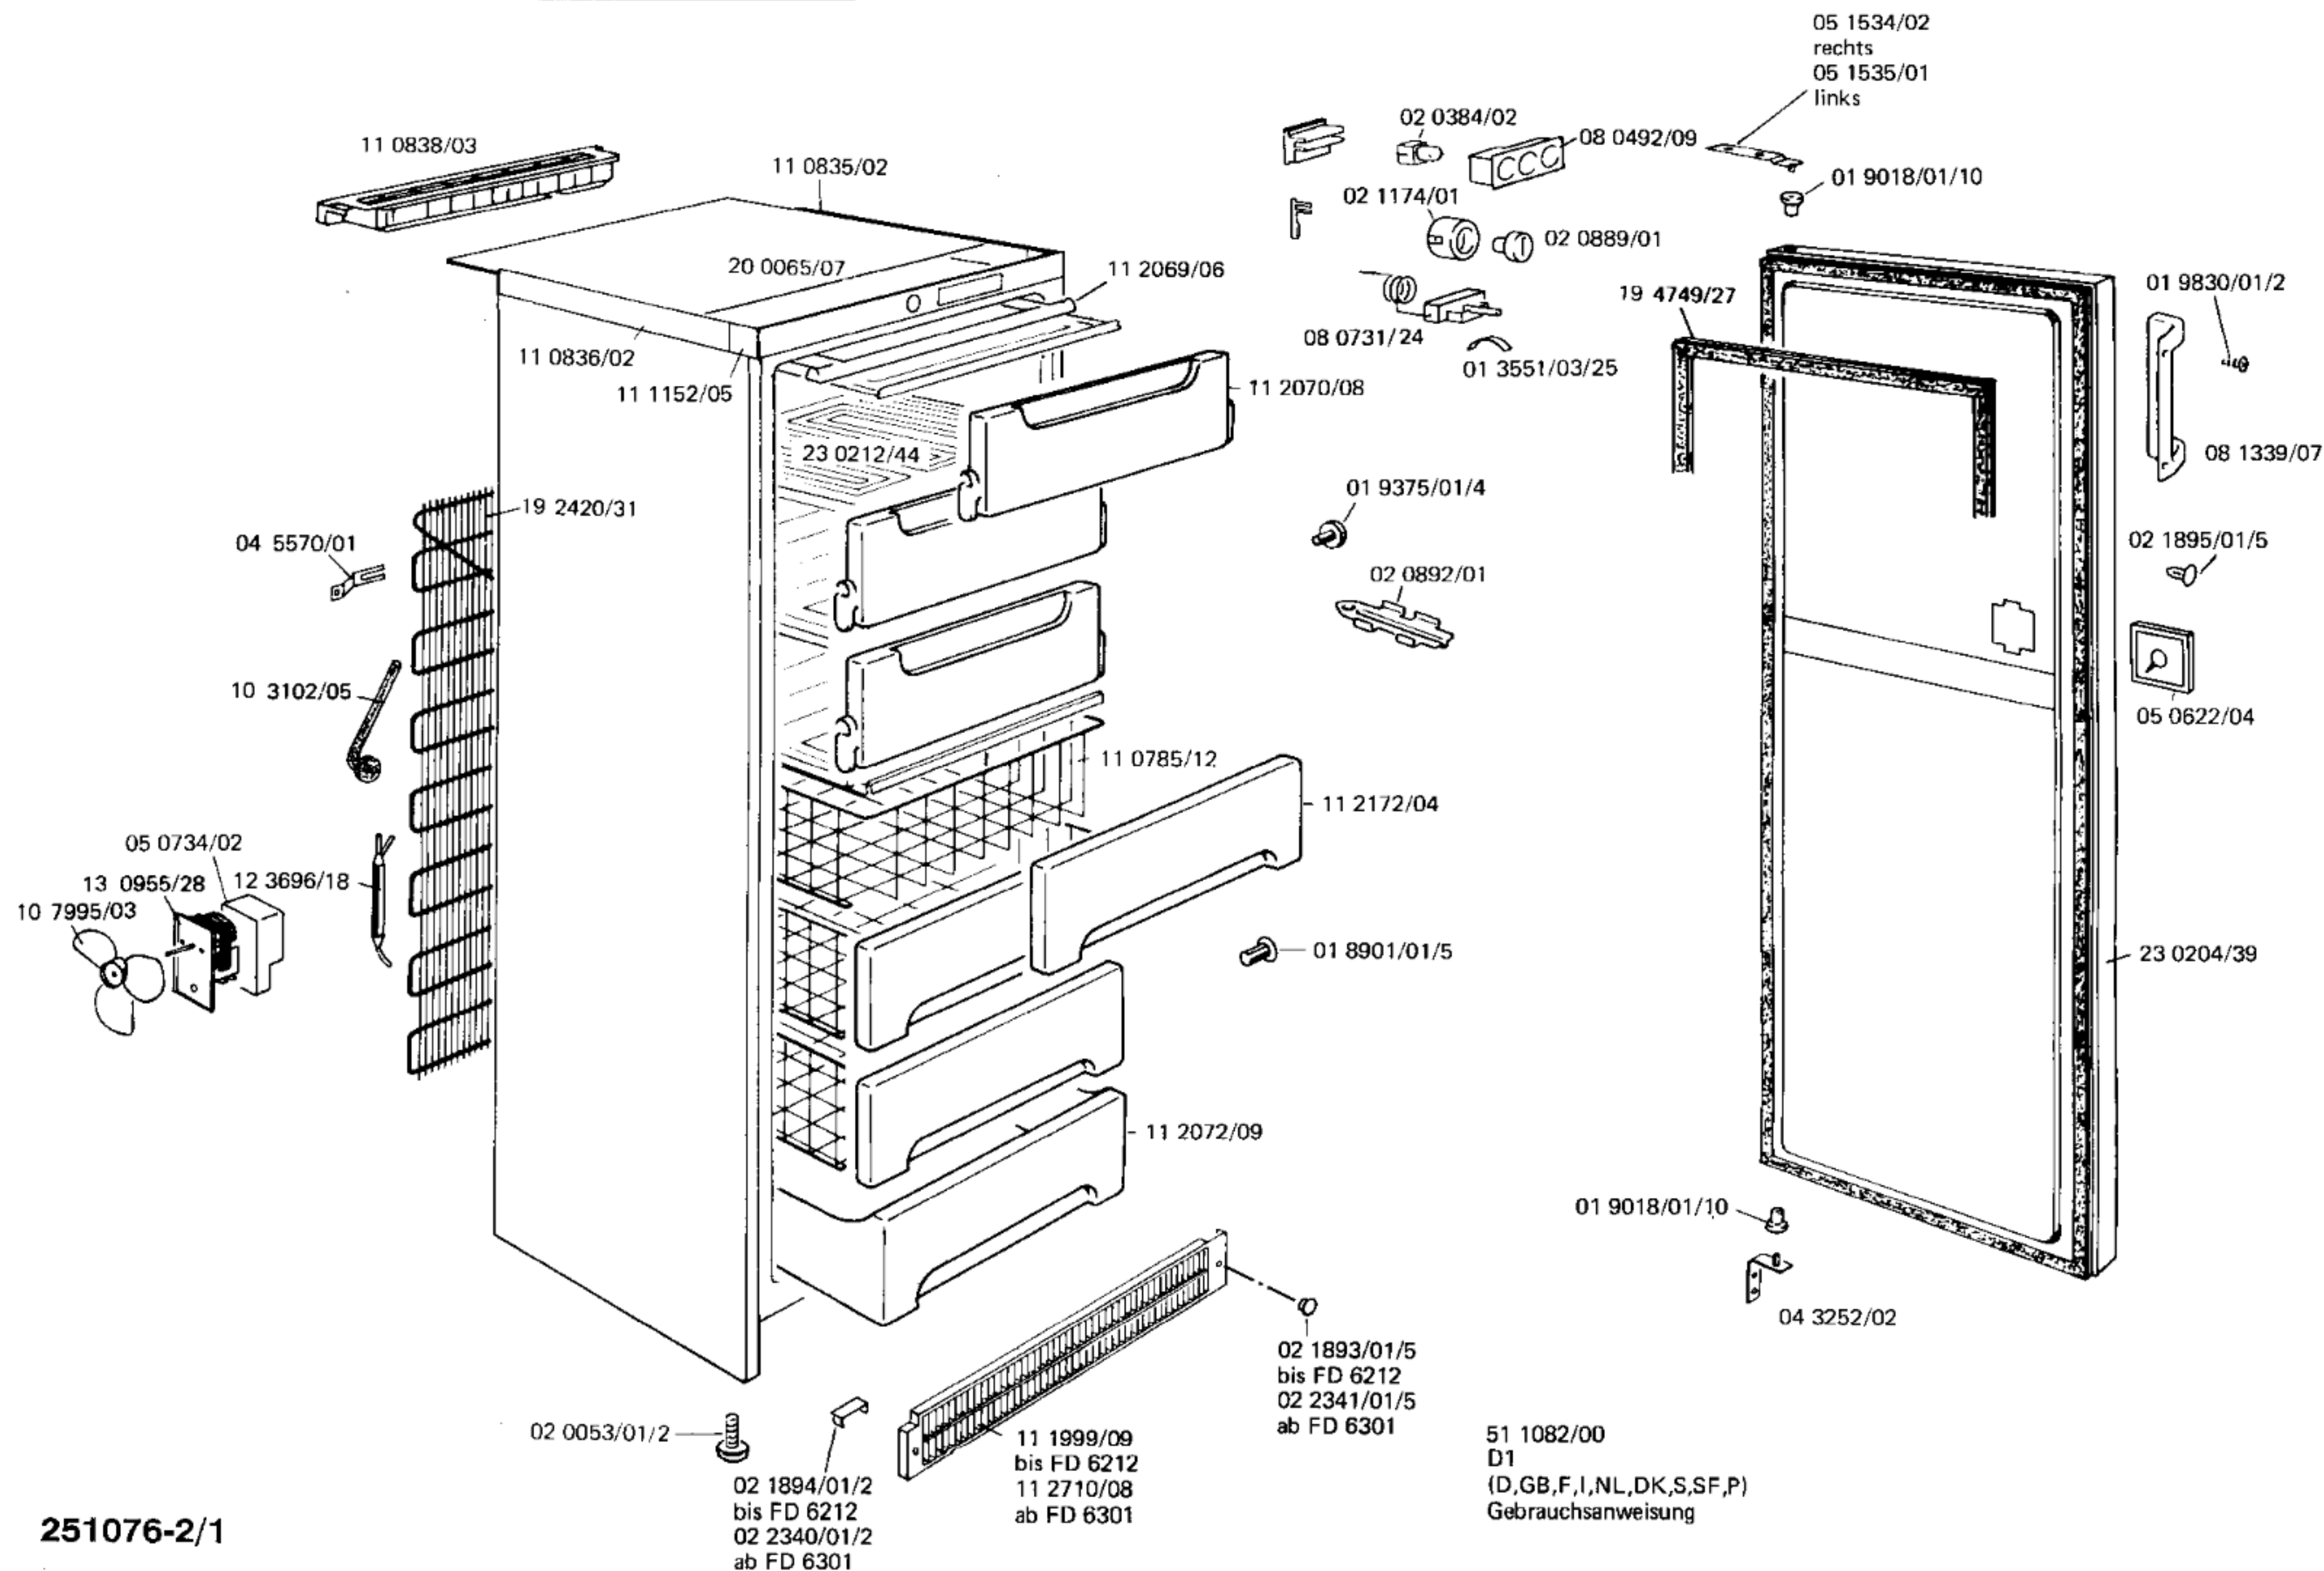

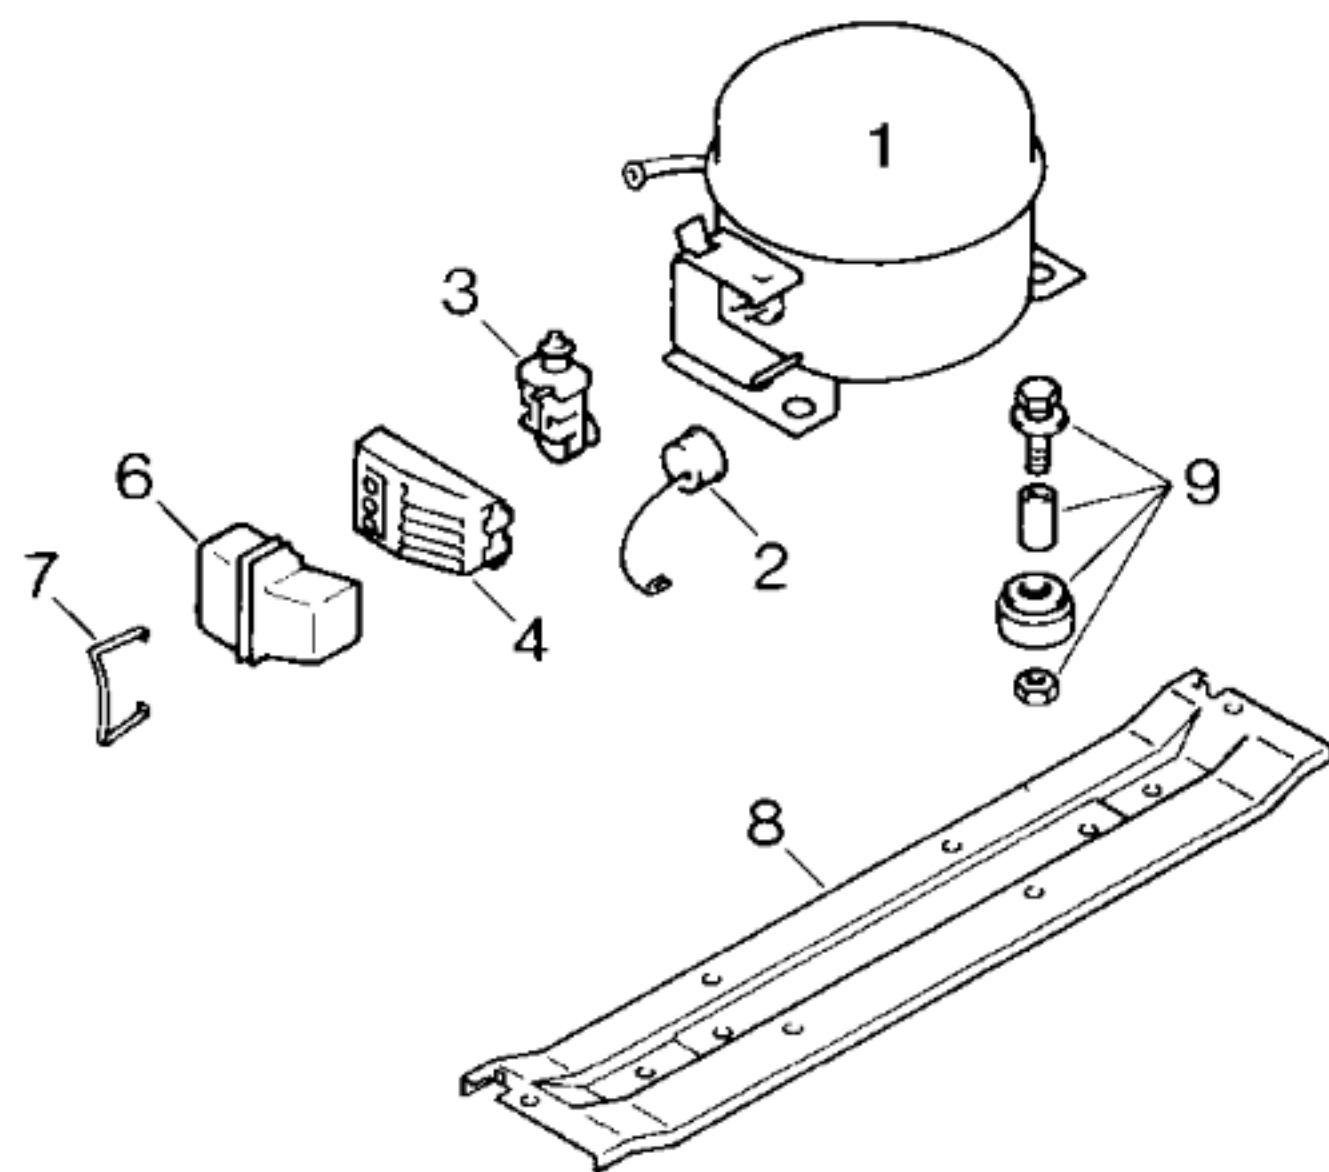

Ausführung	Pos.						
		Necchi	Matsushita				
Verdichter	1	13 0660/45	14 0107/44				
Schutzschalter	2	07 3674/18	02 1733/09				
Anlaufrelais	3	07 3673/18	02 1734/09				
Klemmbrett	4	04 9990/05	05 1289/14				
Zugentlastung	5	—	—				
Kappe	6	04 9991/01	05 1289/14				
Klammer	7	04 9996/01	02 1735/01/2				
Tragschiene	8	11 1567/03	—				
Befestigung	9	05 0166/05	—				
Kondensator	10	—	—				
Verdunsterschale	11	—	—				
Befestigung	12	—	—				
Winkel	13	—	—				
Kabelsatz	14	—	—				

TECHNISCHE DATEN

Verdichter		Necchi	Matsushita			
Typ		M 7 J	FN 73 F 13 S			
Förderleistung l/h		V 1260	V 1310			
Anlaufstrom A		11,0	8,0			
Widerstand Ω	Ha	11,9	11,6			
	Hi	31,0	60,6			
Temp.-Regler:		Ranco				
Typ		A 56				
Reglerstellung		kalt warm				
Schaltwerte °C ein:		- 26 - 18				
	aus:	- 34 - 24				
(abtauen od.) alarm:		- 20 - 13				
Füllmenge R 12 g		185				
Anschlußwert W		170				
Heizung:						
Widerstand Ω						
Leistung W						
Ventilator:						
Widerstand Ω		178				
Magnetventil:						
Widerstand Ω						
Spannung V						