


**BOSCH**

GSD1342/01-V01
 GSD1342CH/01-V02
 GSD1342FF/01-V03
 GSD1342SD/01-V04

GSD1342/02-V05 GSD1342/03-V09
 GSD1342CH/02-V06
 GSD1342FF/02-V07
 GSD1342SD/02-V08

KÜHL-, GEFRIERGERÄTE
 Gefrierschränke, Stand

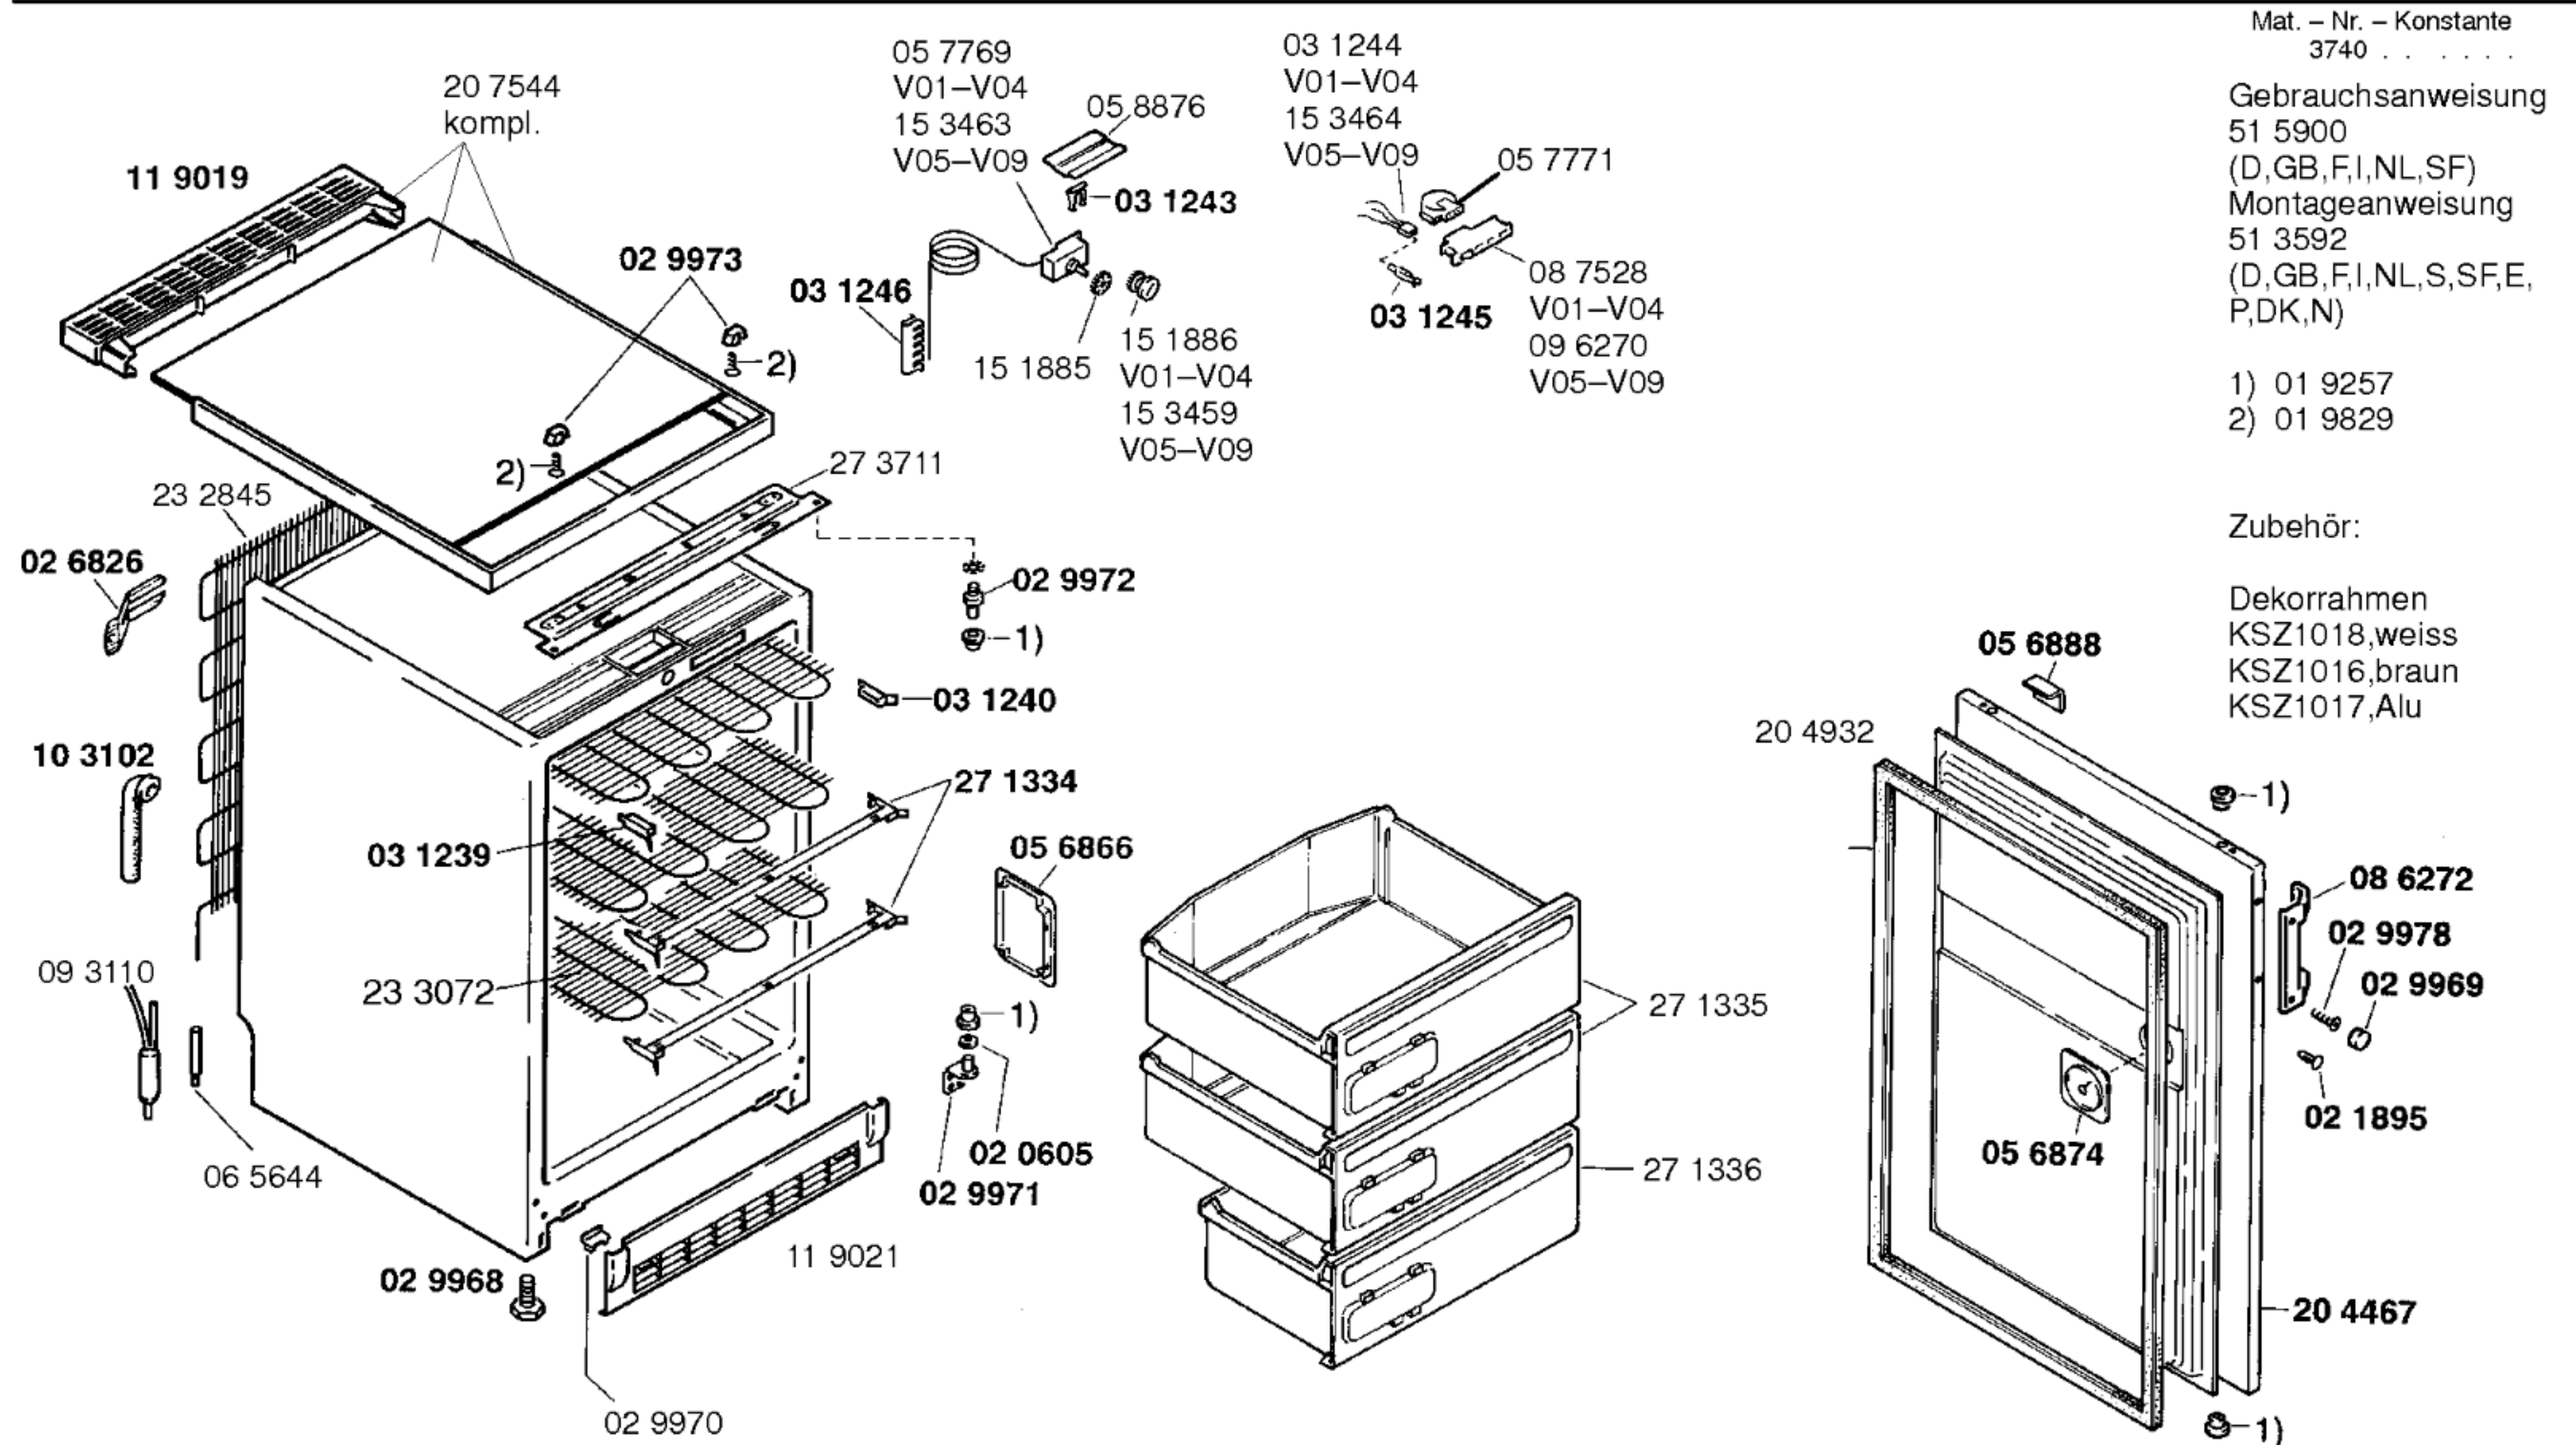


**BOSCH**

GSD1342/01-V01
 GSD1342CH/01-V02
 GSD1342FF/01-V03
 GSD1342SD/01-V04

GSD1342/02-V05 GSD1342/03-V09
 GSD1342CH/02-V06
 GSD1342FF/02-V07
 GSD1342SD/02-V08

KÜHL-, GEFRIERGERÄTE
 Gefrierschränke, Stand

Mat. – Nr. – Konstante
 3740

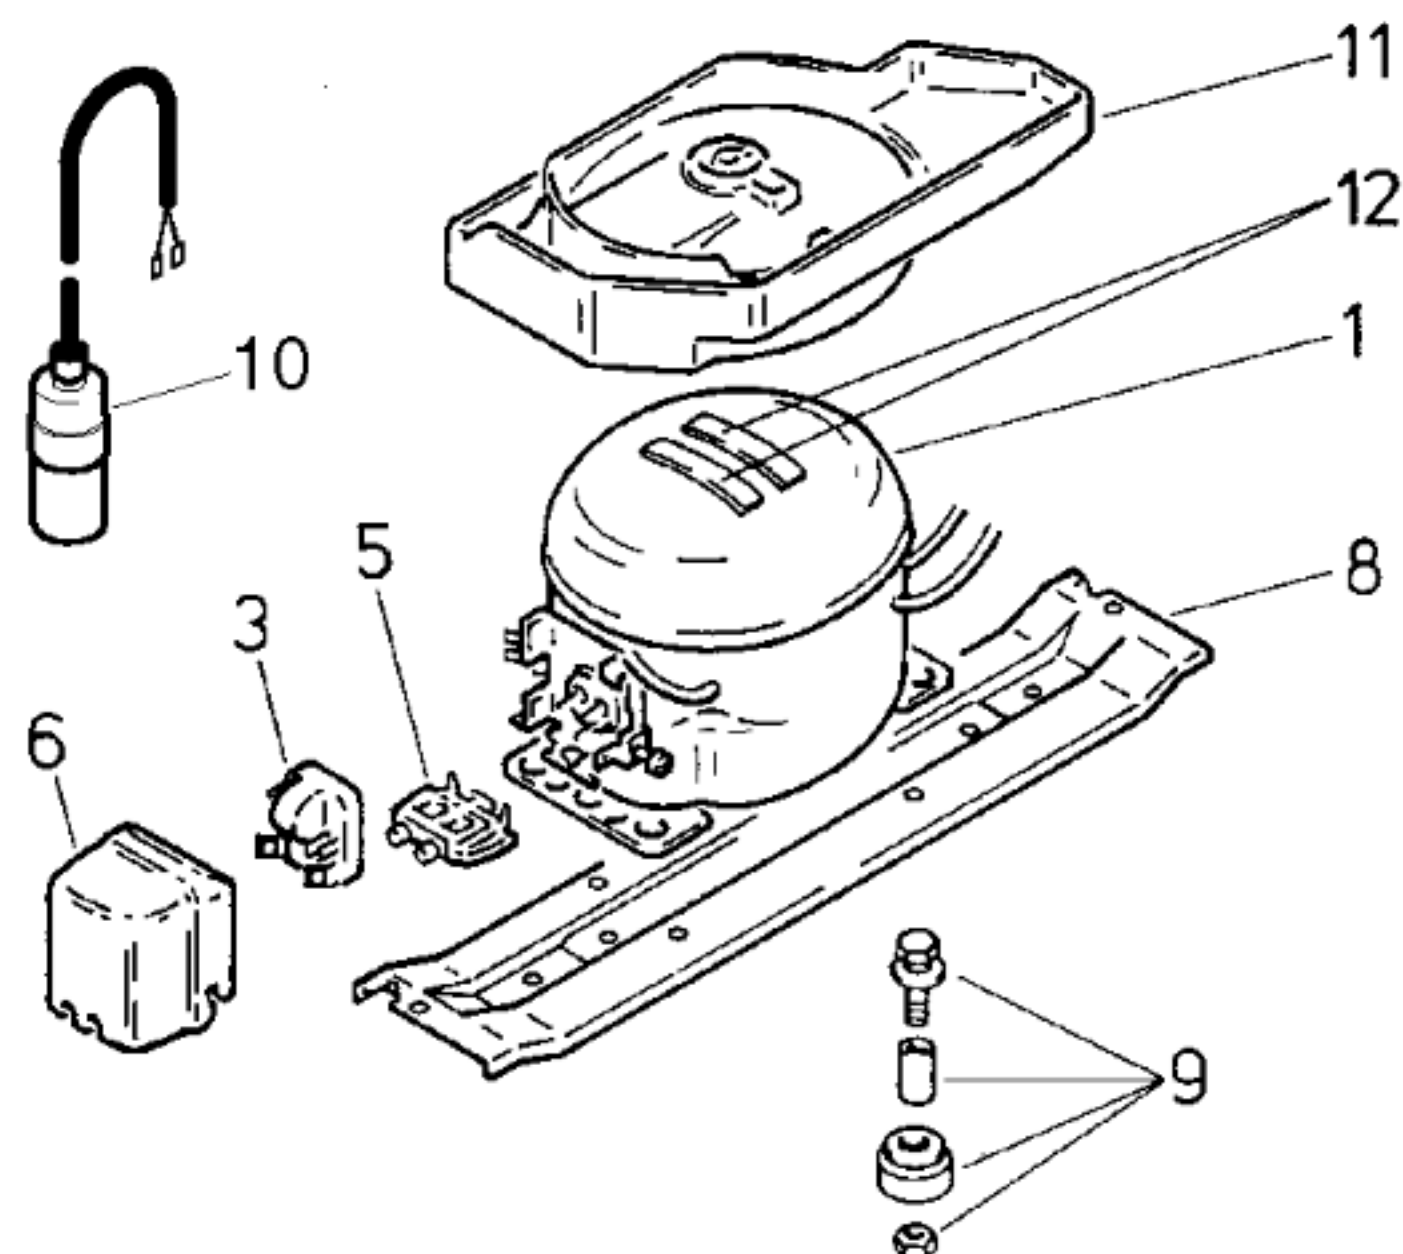

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES					
Verdichter/Compressor/Compresseur		Danfoss		Matsushita	
Typ/Type		TLES 7 K		SD 65 E	
Förderleistung/Delivery/Débit		l/h		1168	
Anlaufstrom/Starting current/Cour de démarrage		A		4,5	
Widerstand/Resistance/Résistance		Ha/main/prin.		Ω 16,5	
		Hi/aux		Ω 16,9	
Temp.-Regler/Thermostat		WHF		Danfoss	
Typ/Type		TF 57 SF2		BE 002	
Reglerstellung/Position		kalt warm		kalt warm	
Schaltwerte/Switching values/		-25 -17		-25 -17	
Valeurs de commutation		-33 -23		-33 -23	
(„abtauen“ od.)		-19,5 -13		-19,5 -13	
Füllmenge/Fill.quantity/Charge		R600a		g	
		40			
Anschlußwert/Conn.load/Puiss. connectée		W		79	
				78	
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Schaltuhr/Timer/Minuterie de contact					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			

Pos.	V01-V08	V09	
	Danfoss	Matsushita	
	TLES 7 K	SD 65 E	
1	14 1239	14 1316	
2			
3	15 1055	15 3306	
4			
5	15 0760	15 3865	
6	15 1072	15 3303	
7			
8	27 0833	27 0833	
9			
10			
11			
12			