



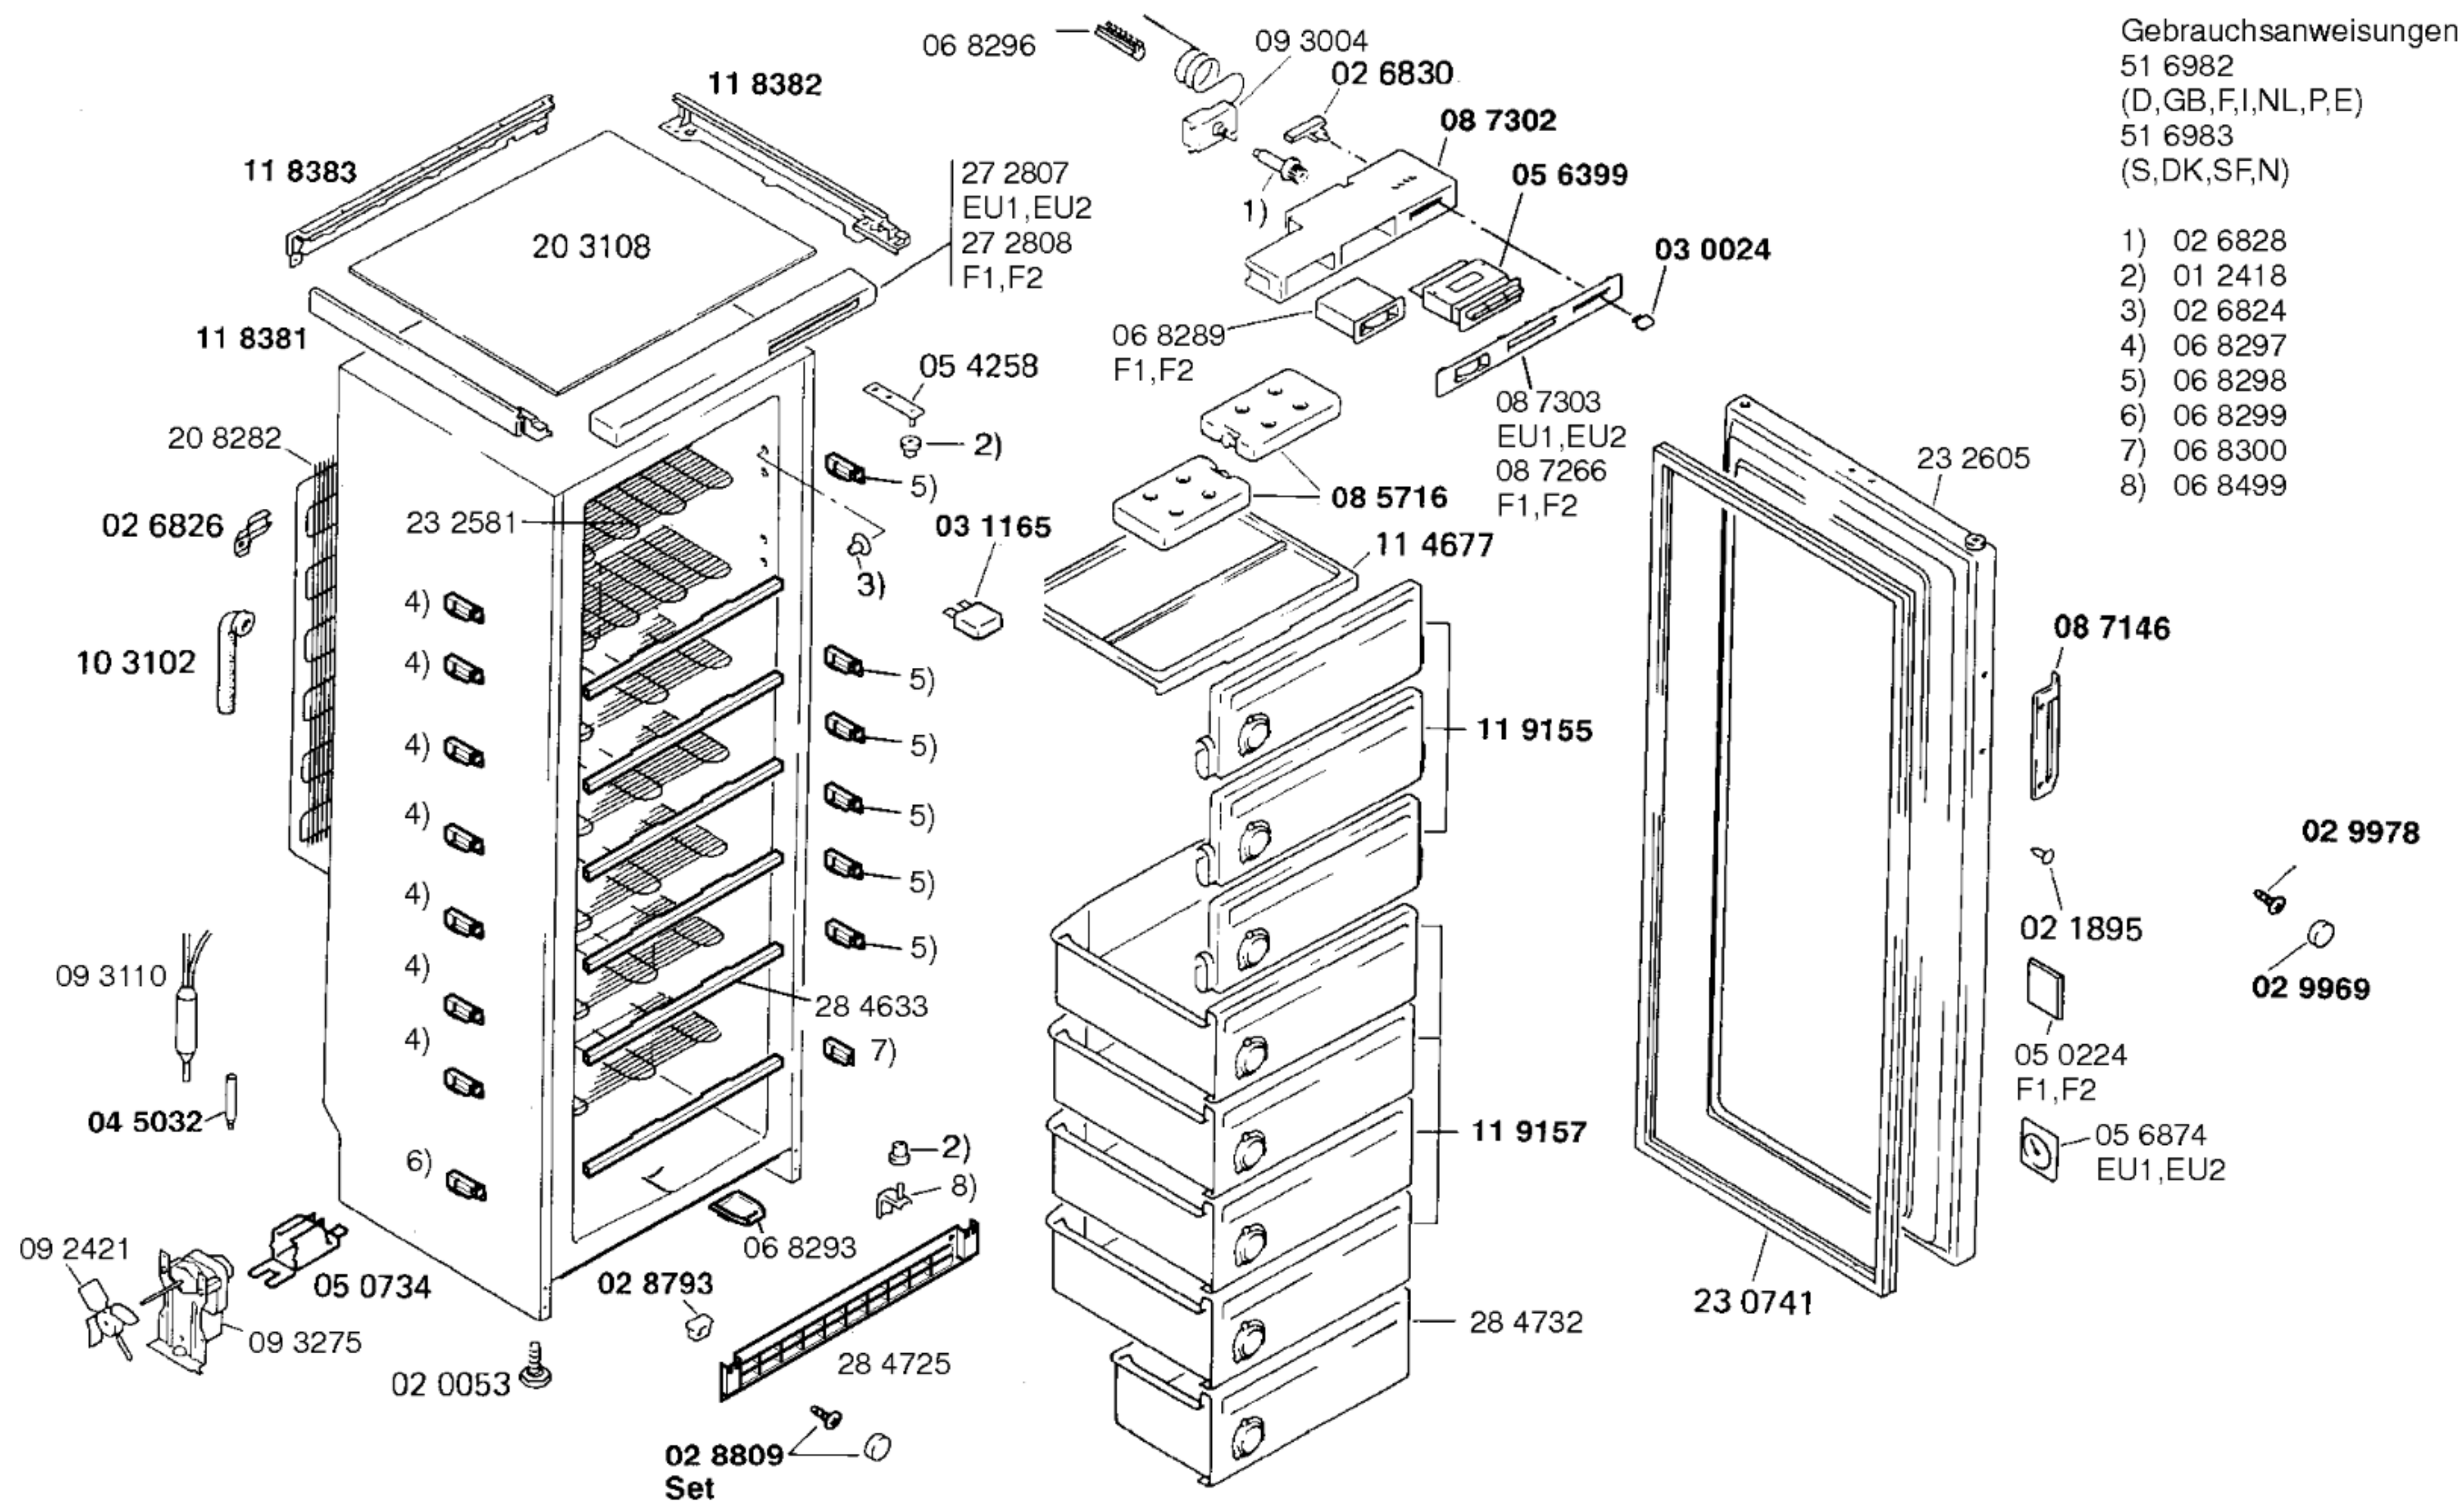

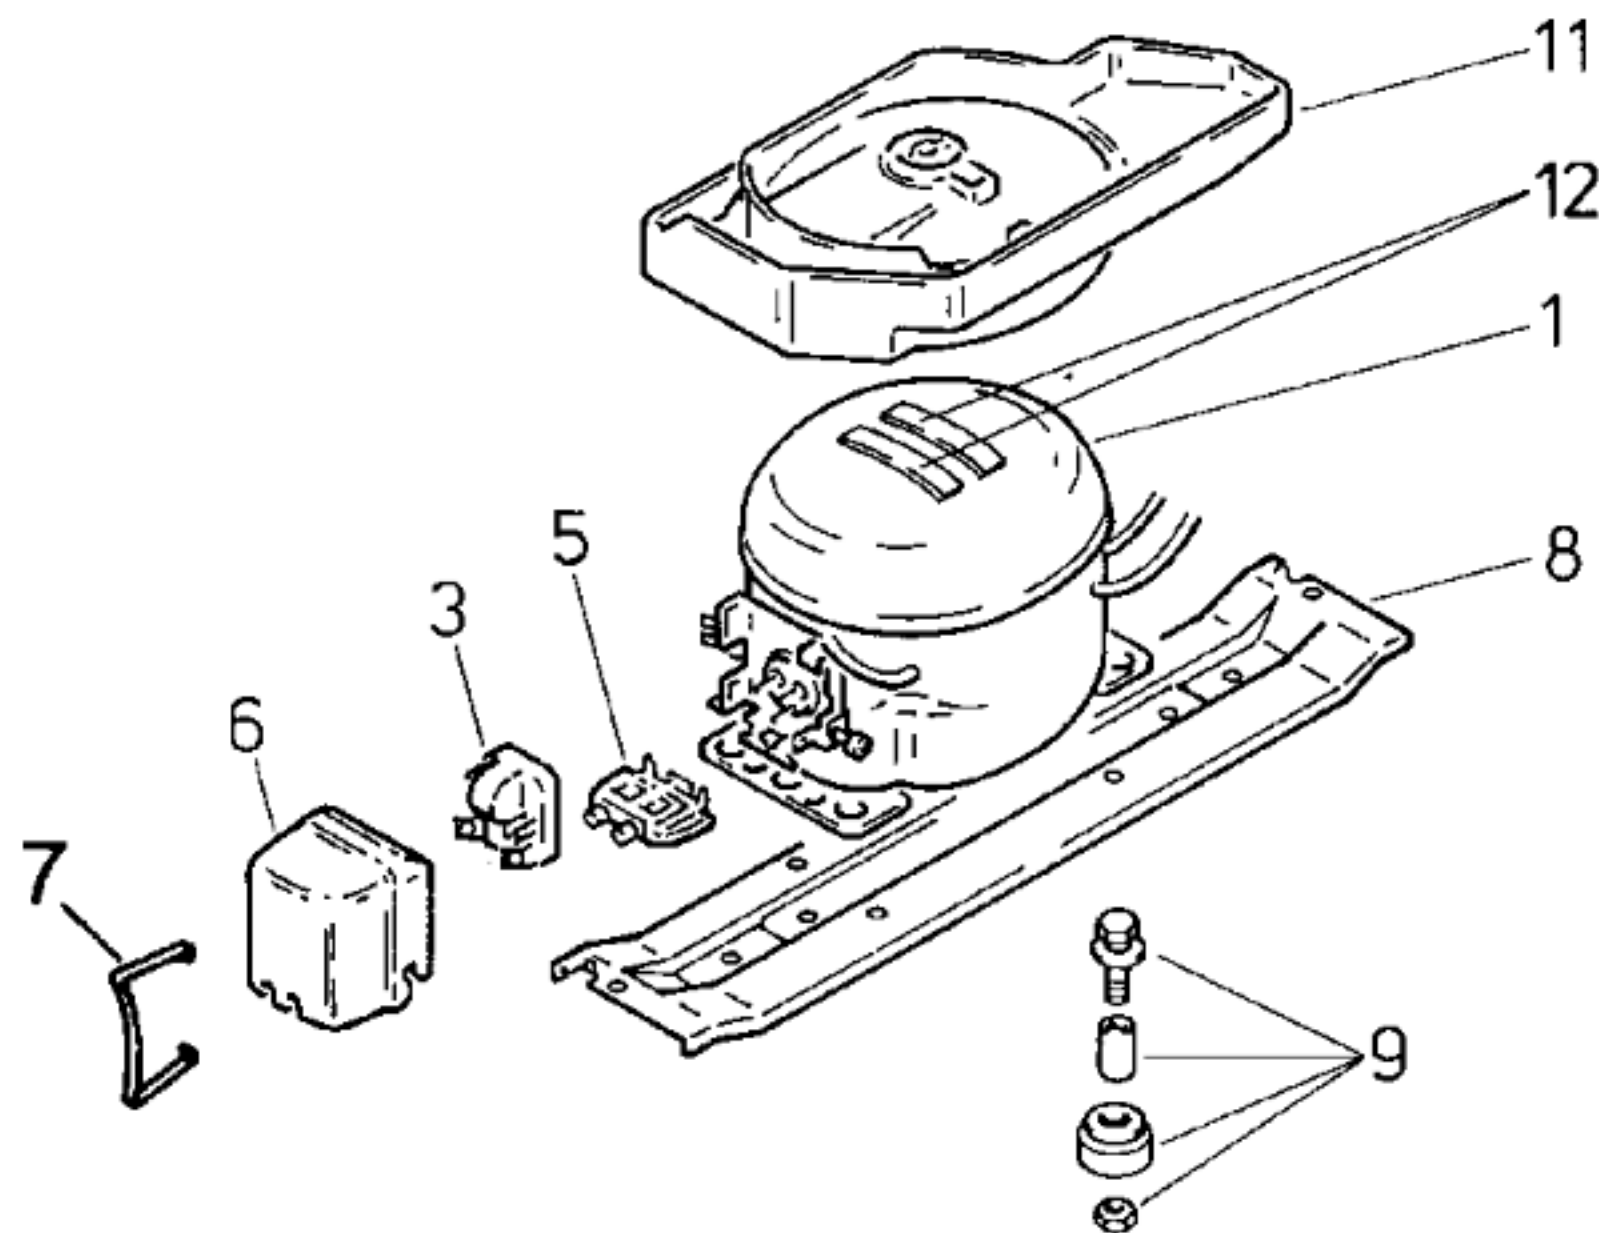

Pos.	EU1,F1	EU2,F2	
	Matsushita	Danfoss	
	D119LRAA	NL7A	
1	14 0560	14 0908	
2			
3	03 2035	06 8290	
4			
5		06 8292	
6	05 8458	06 8291	
7	02 6731		
8	11 9114	11 9114	
9	05 0166	05 0166	
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita	Danfoss	
Typ/Type		D119LRAA	NL7A	
Förderleistung/Delivery/Débit		l/h	1384	1260
Anlaufstrom/Starting current/Cour de démarrage		A	9,6	10,5
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	11,0	13,5
		Hi/aux Ω	26,7	14,1
Temp.-Regler/Thermostat		Danfoss		
Typ/Type		077B2157		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$	-22 -14	
Valeurs de commutation		„aus“	-32 -22	
		(„abtauen“ od.) „alarm“	-17,5 -10	
Füllmenge/Fill.quantity/Charge		R12 g	220	
Anschlußwert/Conn.load/Puiss. connectée		W	190	160
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω	190	
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		