



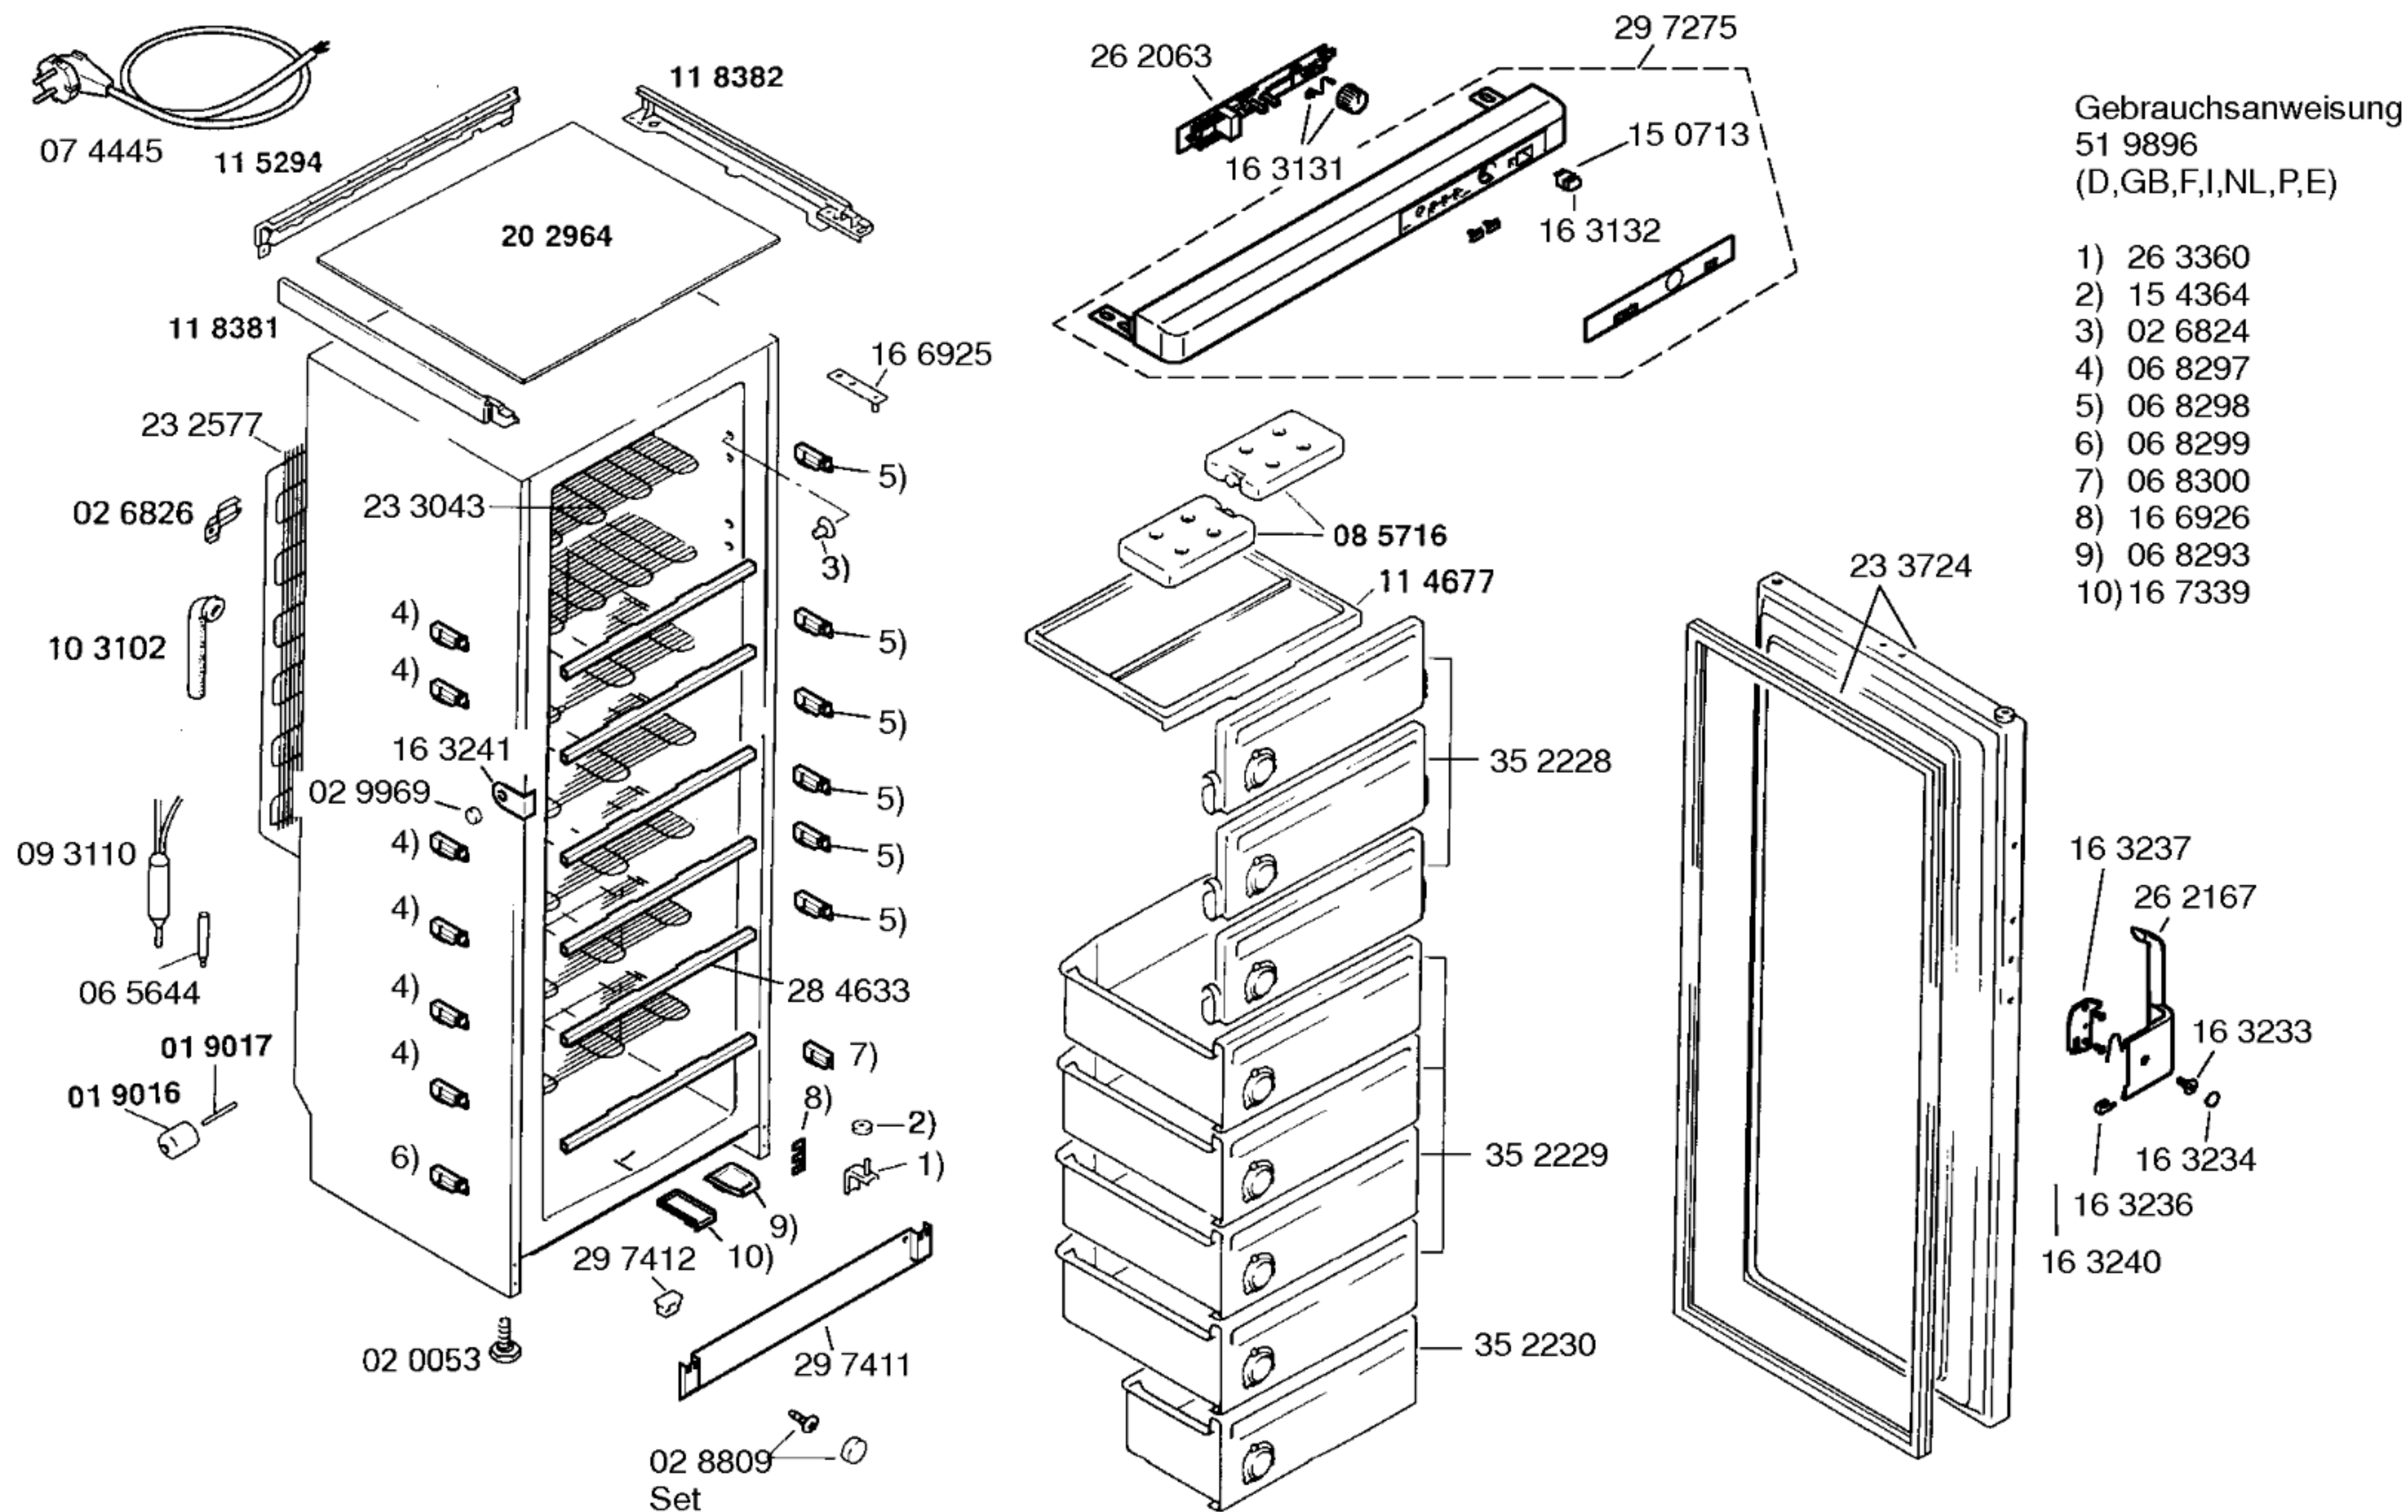

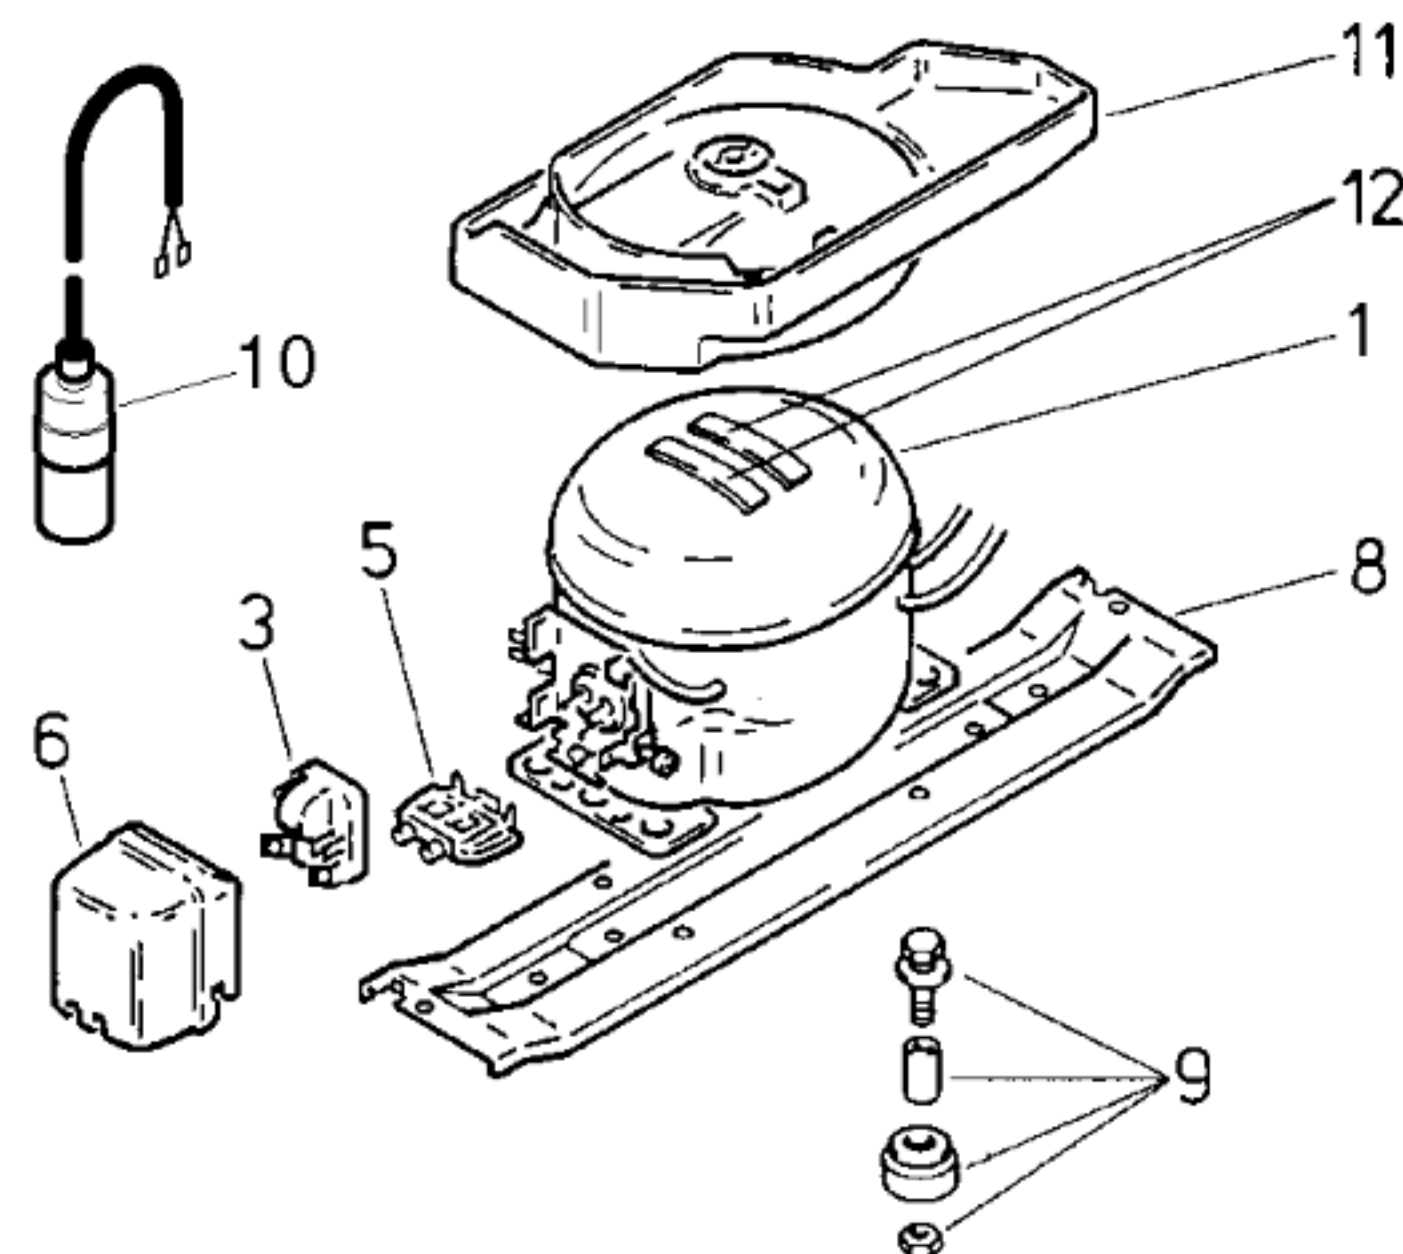

Pos.			
	Matsushita		
	DA 12 SE		
1	14 1556		
2			
3	03 2035		
4			
5	16 2549		
6	05 8458		
7			
8	11 1567		
9			
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES						
Verdichter/Compressor/Compresseur		Matsushita				
Typ/Type		DA 12 SE				
Förderleistung/Delivery/Débit		l/h	2250			
Anlaufstrom/Starting current/Cour de démarrage		A	8,7			
Widerstand/Resistance/Résistance		Ha/main/prin	Ω	12,0		
		Hi/aux	Ω	28,7		
Temp.–Regler/Thermostat		Elektronisch				
Solltemperatur–Einstellung		°C	EIN AUS			
		"warm"	–14 –15			
		"kalt"	–22 –23			
		"alarm"	–10 –14			
Füllmenge/Fill.quantity/Charge		R600a	siehe Typenschild			
Anschlußwert/Conn.load/Puiss. connectée		W	150			
Heizung/Heater/Chauffage						
Widerstand/Resistance/Résistance		Ω				
Leistung/Power/Puissance		W				
Ventilator/Blower/Ventilateur						
Widerstand/Resistance/Résistance		Ω				
Widerstand NTC–Fühler		°C	kΩ	°C	kΩ	°C kΩ
		–1	17,3	–15	36,5	–20 48,6
		–9	26,2	–16	38,8	–23 58,1
		–14	34,5	–19	45,9	–24 61,6
Magnetventil/Magnetic valve/Electrovanne						
Widerstand/Resistance/Résistance		Ω				
Spannung/Voltage/Tension		V				