

**BOSCH**GSL5203/01-V01
GSL5203/02-V02KÜHL-,GEFRIERGERÄTE
Gefrierschränke, StandMat. - Nr. - Konstante
3740

Gebrauchsanweisungen

51 6980

(D,GB,F,I,NL,P,E)

51 6981

(S,DK,SF,N)

1) 02 6816

2) 026819

3) 02 7786

4) 02 6824

5) 06 8297


6) 06 8299


7) 06 8298

8) 06 8300

9) 02 9978

10) 05 4795

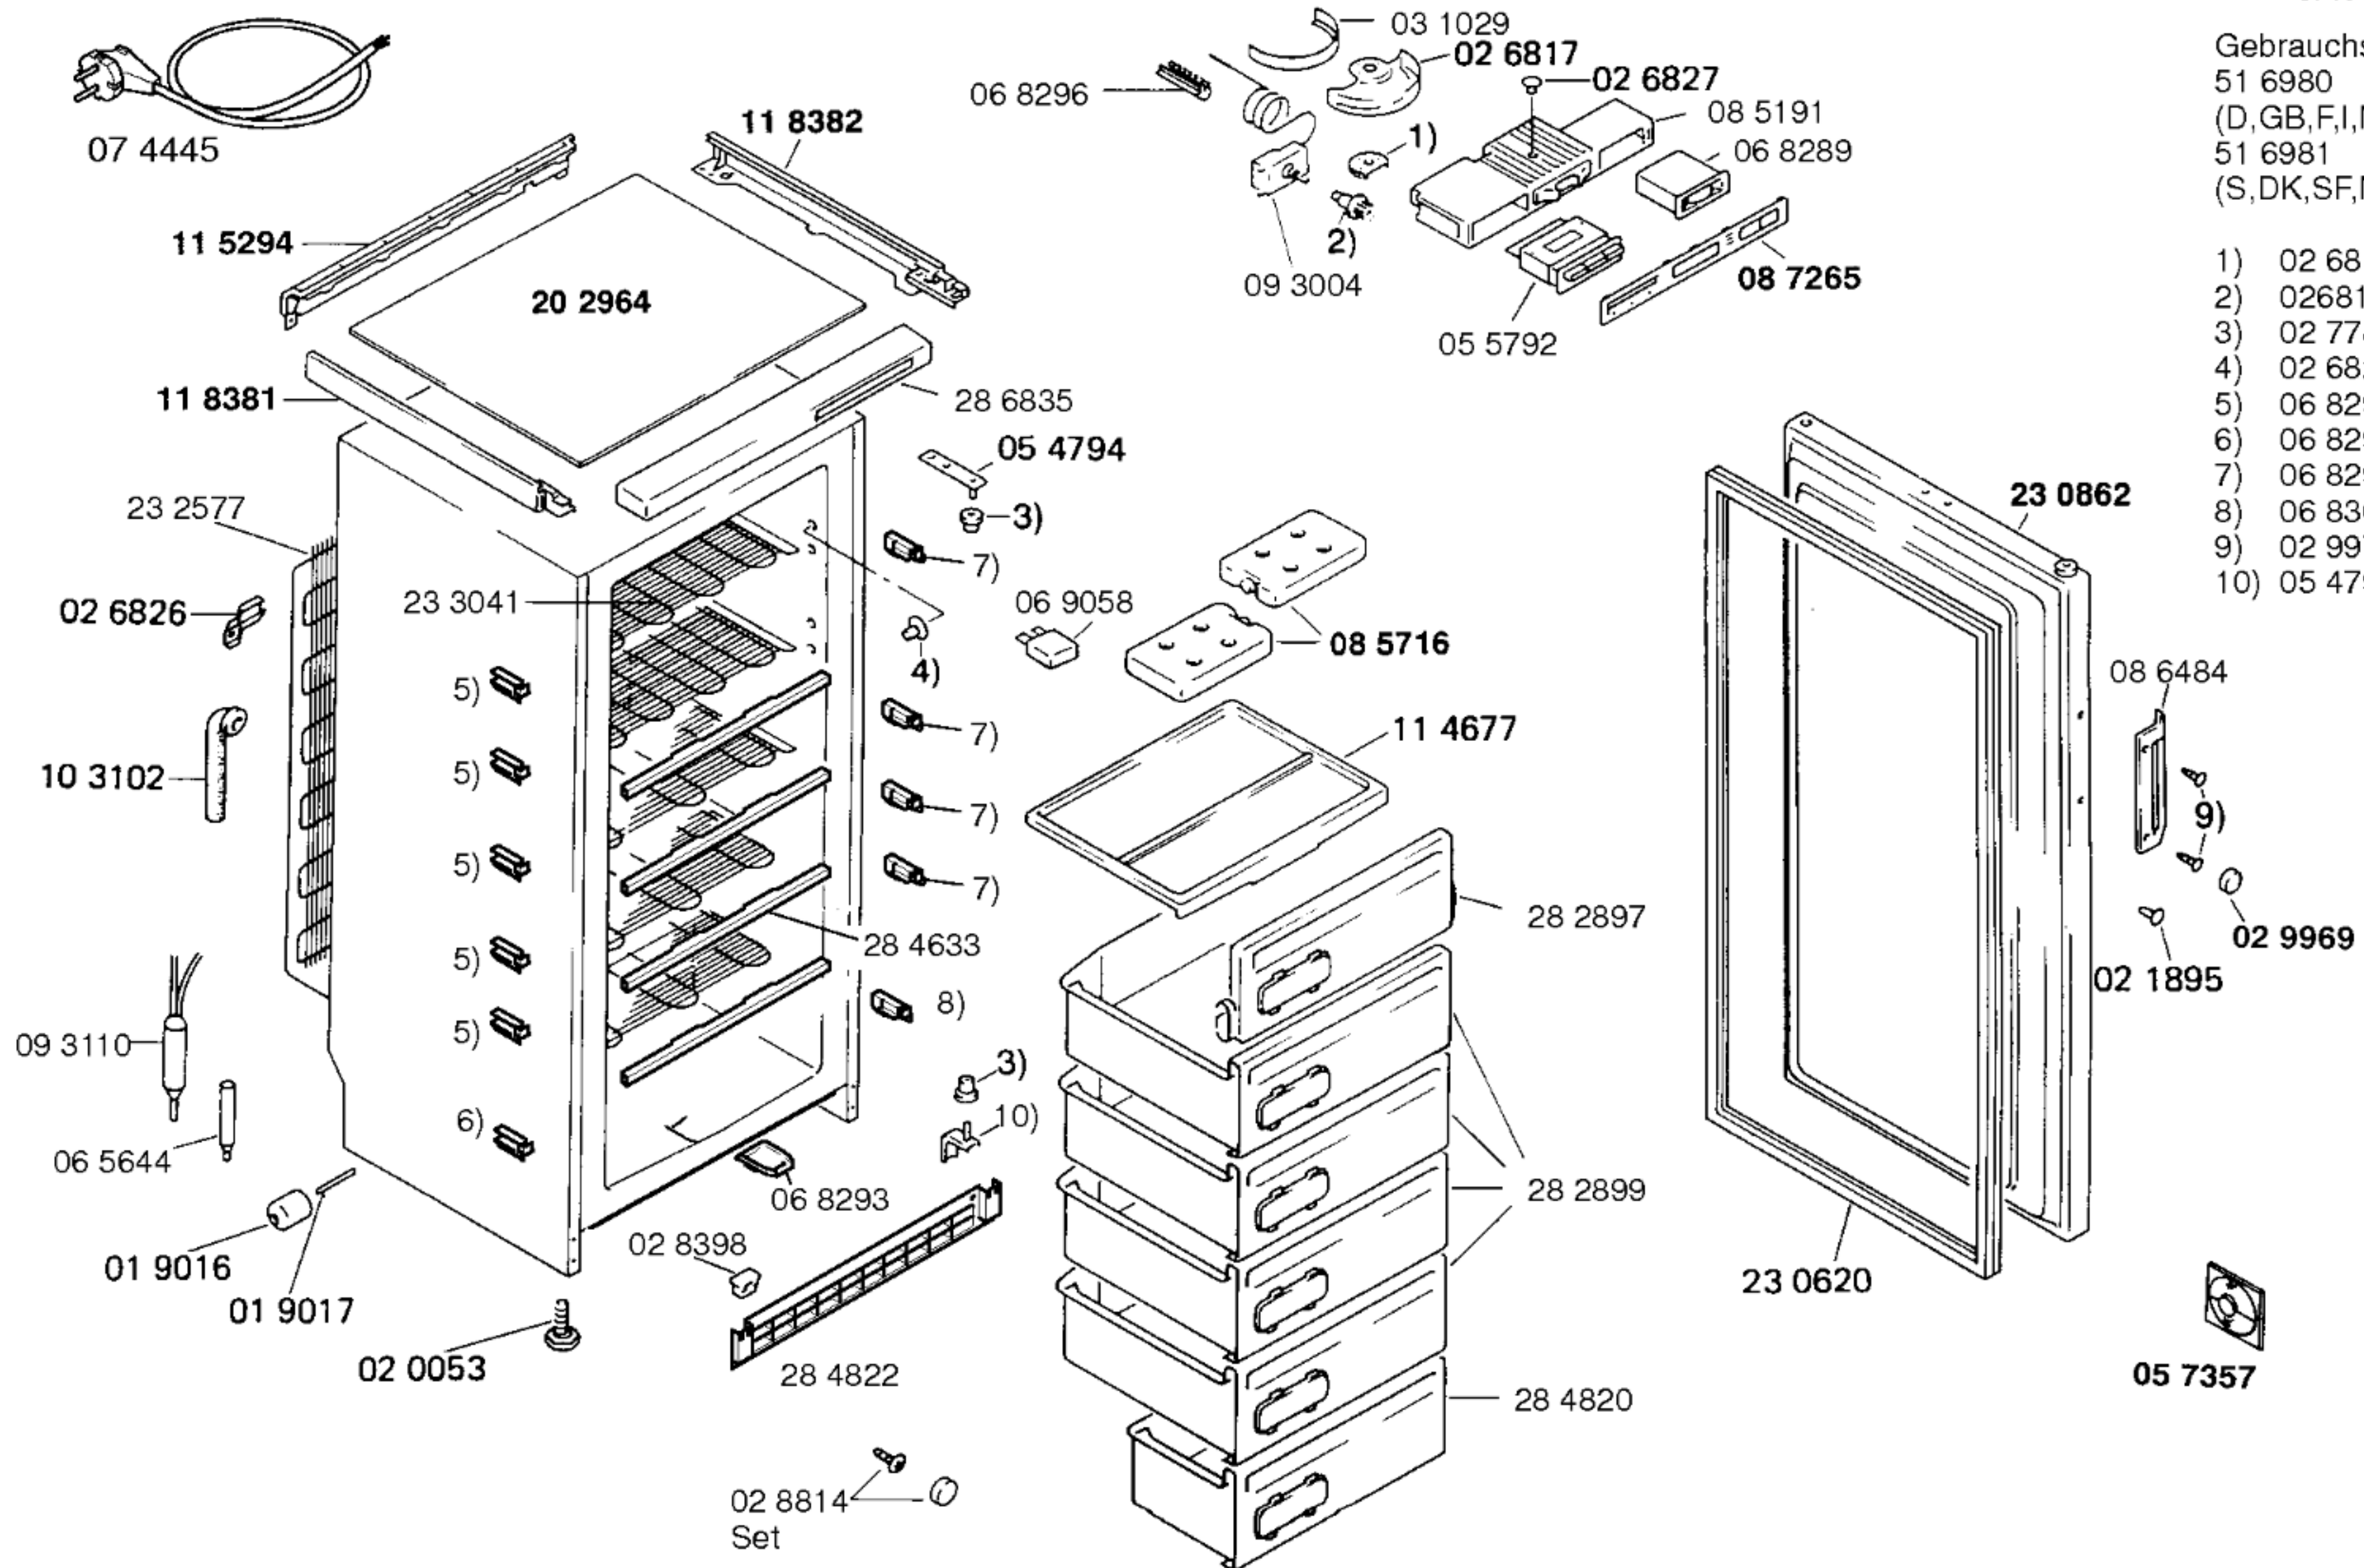

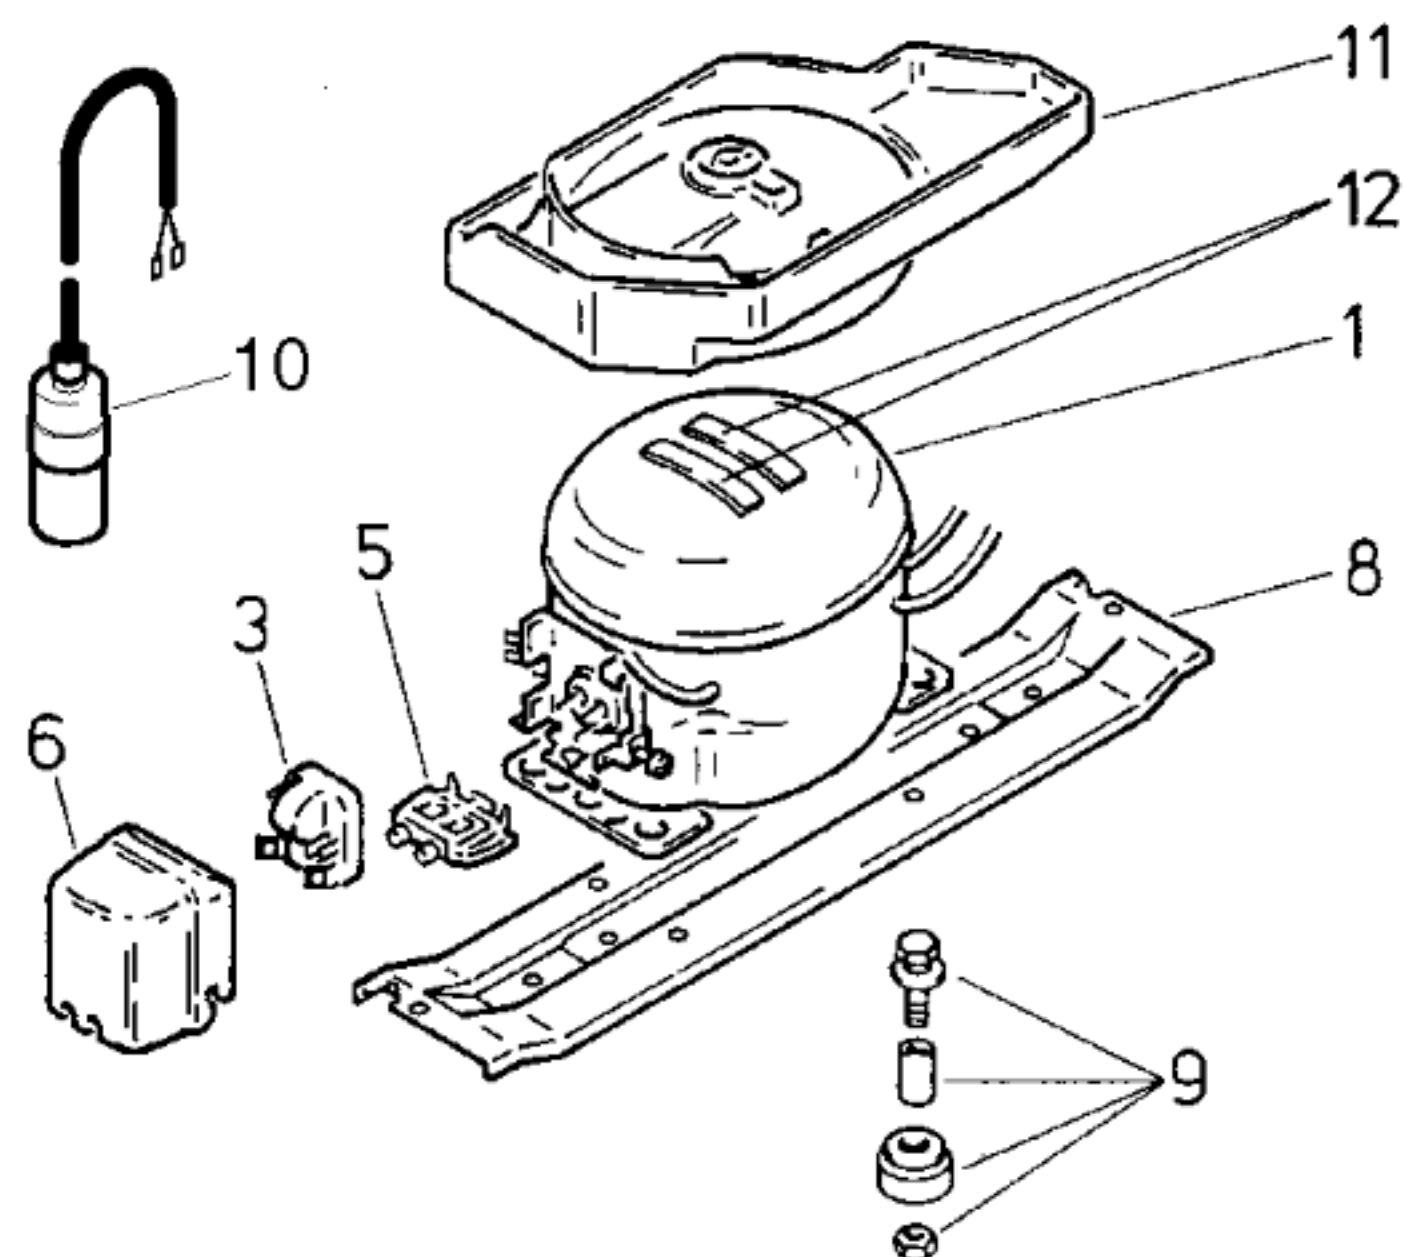

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur	Danfoss		
Typ/Type	NLE 11 K		
Förderleistung/Delivery/Débit	l/h	2007	
Anlaufstrom/Starting current/Cour de démarrage	A	10,7	
Widerstand/Resistance/Résistance	Ha/main/prin.	Ω	12,9
	Hi/aux	Ω	18

Temp.-Regler/Thermostat	Danfoss		
Typ/Type	077B2157		
Reglerstellung/Position	kalt	warm	
Schaltwerte/Switching values/	„ein“	°C	–22 –14
Valeurs de commutation	„aus“		–32 –22
	(„abtauen“ od.)	„alarm“	–17,5 –10

Füllmenge/Fill.quantity/Charge	R600a	g	75
--------------------------------	-------	---	----

Anschlußwert/Conn.load/Puiss. connectée	W	120	
---	---	-----	--

Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		

Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		

Schaltuhr/Timer/Minuterie de contact			
Widerstand/Resistance/Résistance	Ω		

Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

Pos.	Danfoss		
	NLE 11 K		
1	14 1319		
2			
3	15 1055		
4			
5	15 0760		
6	15 1072		
7			
8	11 1919		
9	05 0166		
10			
11			
12			