



**BOSCH**

KÜHLSCHRANK KS 170 ELD	- 0 702 174 750-D1	KS 170 ELD	- 0 702 174 758-CH1
	- 0 702 174 751-D2		- 0 702 174 759-CH2
	- 0 702 174 756-F1		- 0 702 174 760-SK1
	- 0 702 174 757-F2		- 0 702 174 761-SK2

Ident-Nummern-Konstante
3740

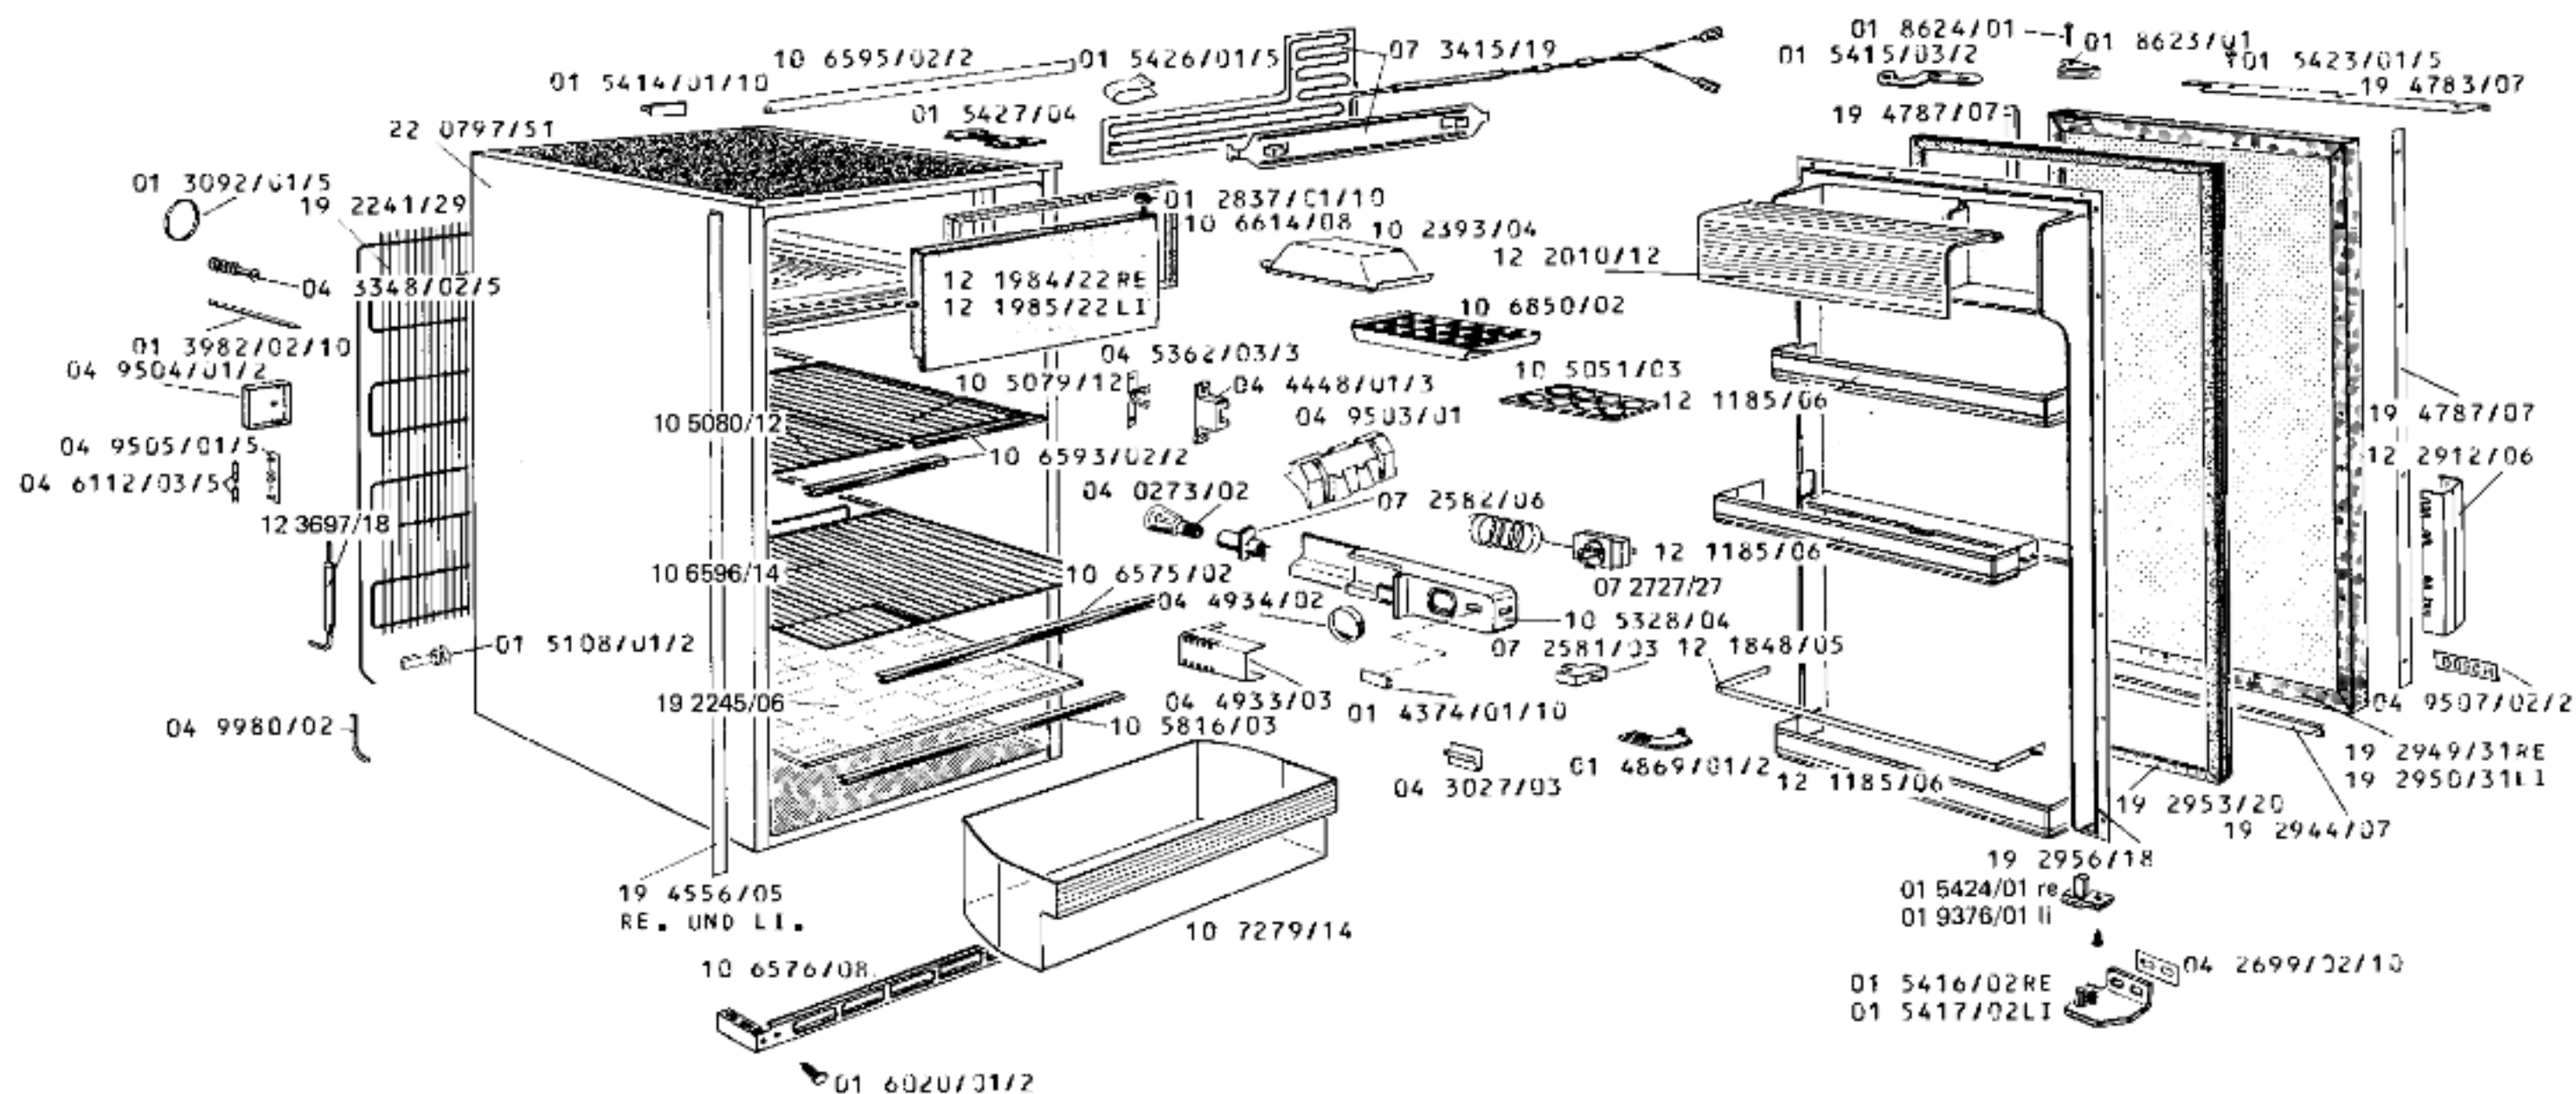

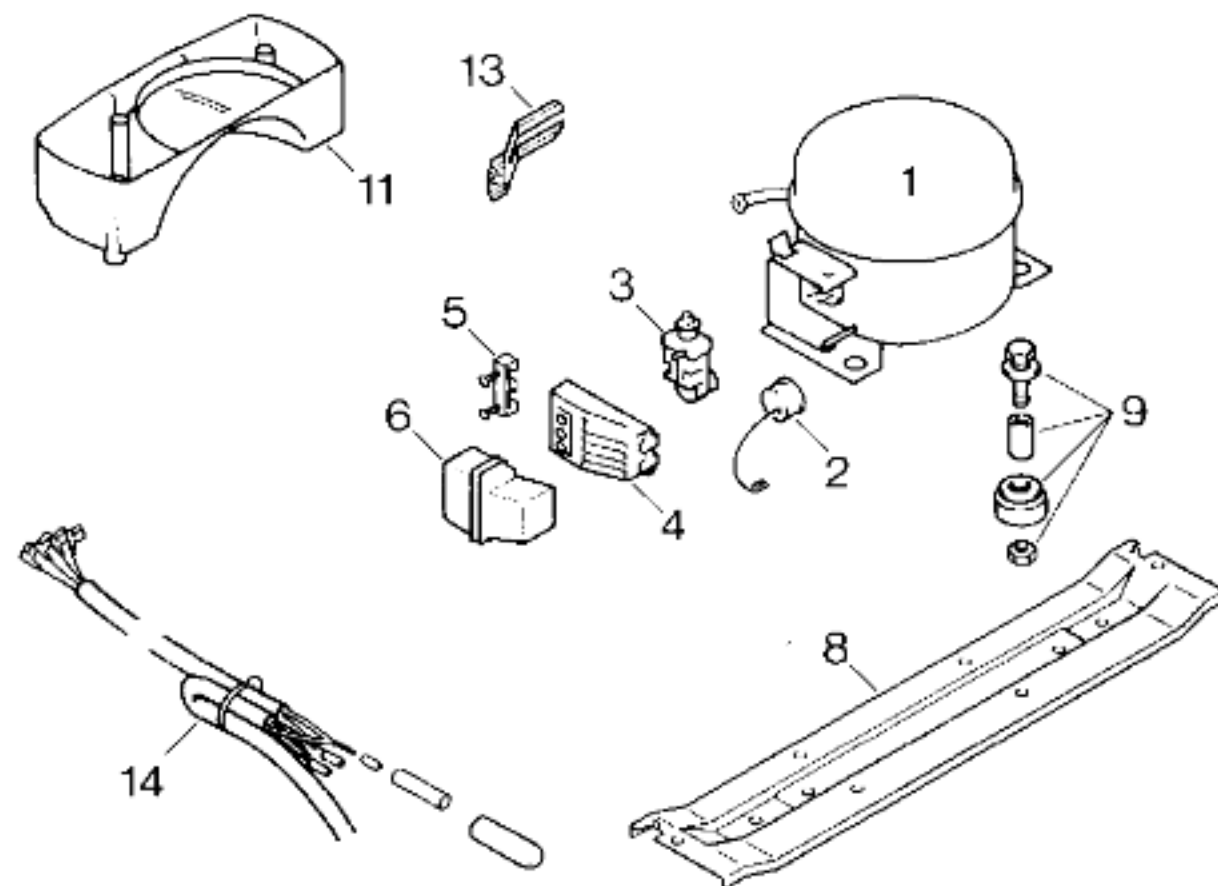

	D1,D2,F1,F2	D1,D2,F1,F2	
	CH1,CH2,SK1,SK2	CH1,CH2,SK1,SK2	
P _{Ver}	Bosch	Danfoss	
1		13 1064/45	
2	07 2115/18		
3	07 1804/18	02 0108/27	
4	04 9757/02		
5		02 1361/04	
6	04 9758/02	05 1413/06	
7			
8		*11 1838/03	
9		*05 0166/05/4	
10			
11	10 6693/03	*11 1243/01	
12			
13		*04 1568/01/2	
14		*05 1226/08	

*) Bei Ersatz des Bosch-Verdichters mitbestellen
To be ordered when replacing the Bosch compressor
A commander lors du remplacement du compresseur Bosch

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur	Bosch	Danfoss		
Typ/Type	V 792	TL 4 A		
Förderleistung/Delivery/Débit	l/h 792	702		
Anlaufstrom/Starting current/Cour. de démarrage	A 8,3	7,8		
Widerstand/Resistance/Résistance	Ha/main/prin. Ω 23,0	23,8		
	Hi/aux Ω 25,2	17,0		
Temp.-Regler/Thermostat	Ranco			
Typ/Type	A 50			
Reglerstellung/Position	kalt warm			
Schaltwerte/Switching values/	+ 4 + 4			
Valeurs de commutation	- 29 - 20			
(„abtauen“ od.)	„alarm“			
Füllmenge/Fill quantity/Charge	R12 g 125			
Anschlußwert/Conn. load/Puiss. connectée	W 115			
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω 3280			
Leistung/Power/Puissance	W 14,8			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			