

**BOSCH**


KS 240 ELD - 0 702 244 358-D1
 KS 217 ELD - 0 702 244 363-F1
 - 0 702 244 364-F2
 KS 240 ELD - 0 702 244 365-SK1


KS 240 ELD - 0 702 244 366-SK2
 - 0 702 244 371-D2
 - 0 702 244 372-D3
 - 0 702 244 379-D4

KS 240 ELD - 0 702 244 380-D5

KÜHLGERÄTE
 Kühlschränke, Einbau

Ident-Nummern-Konstante
 3740

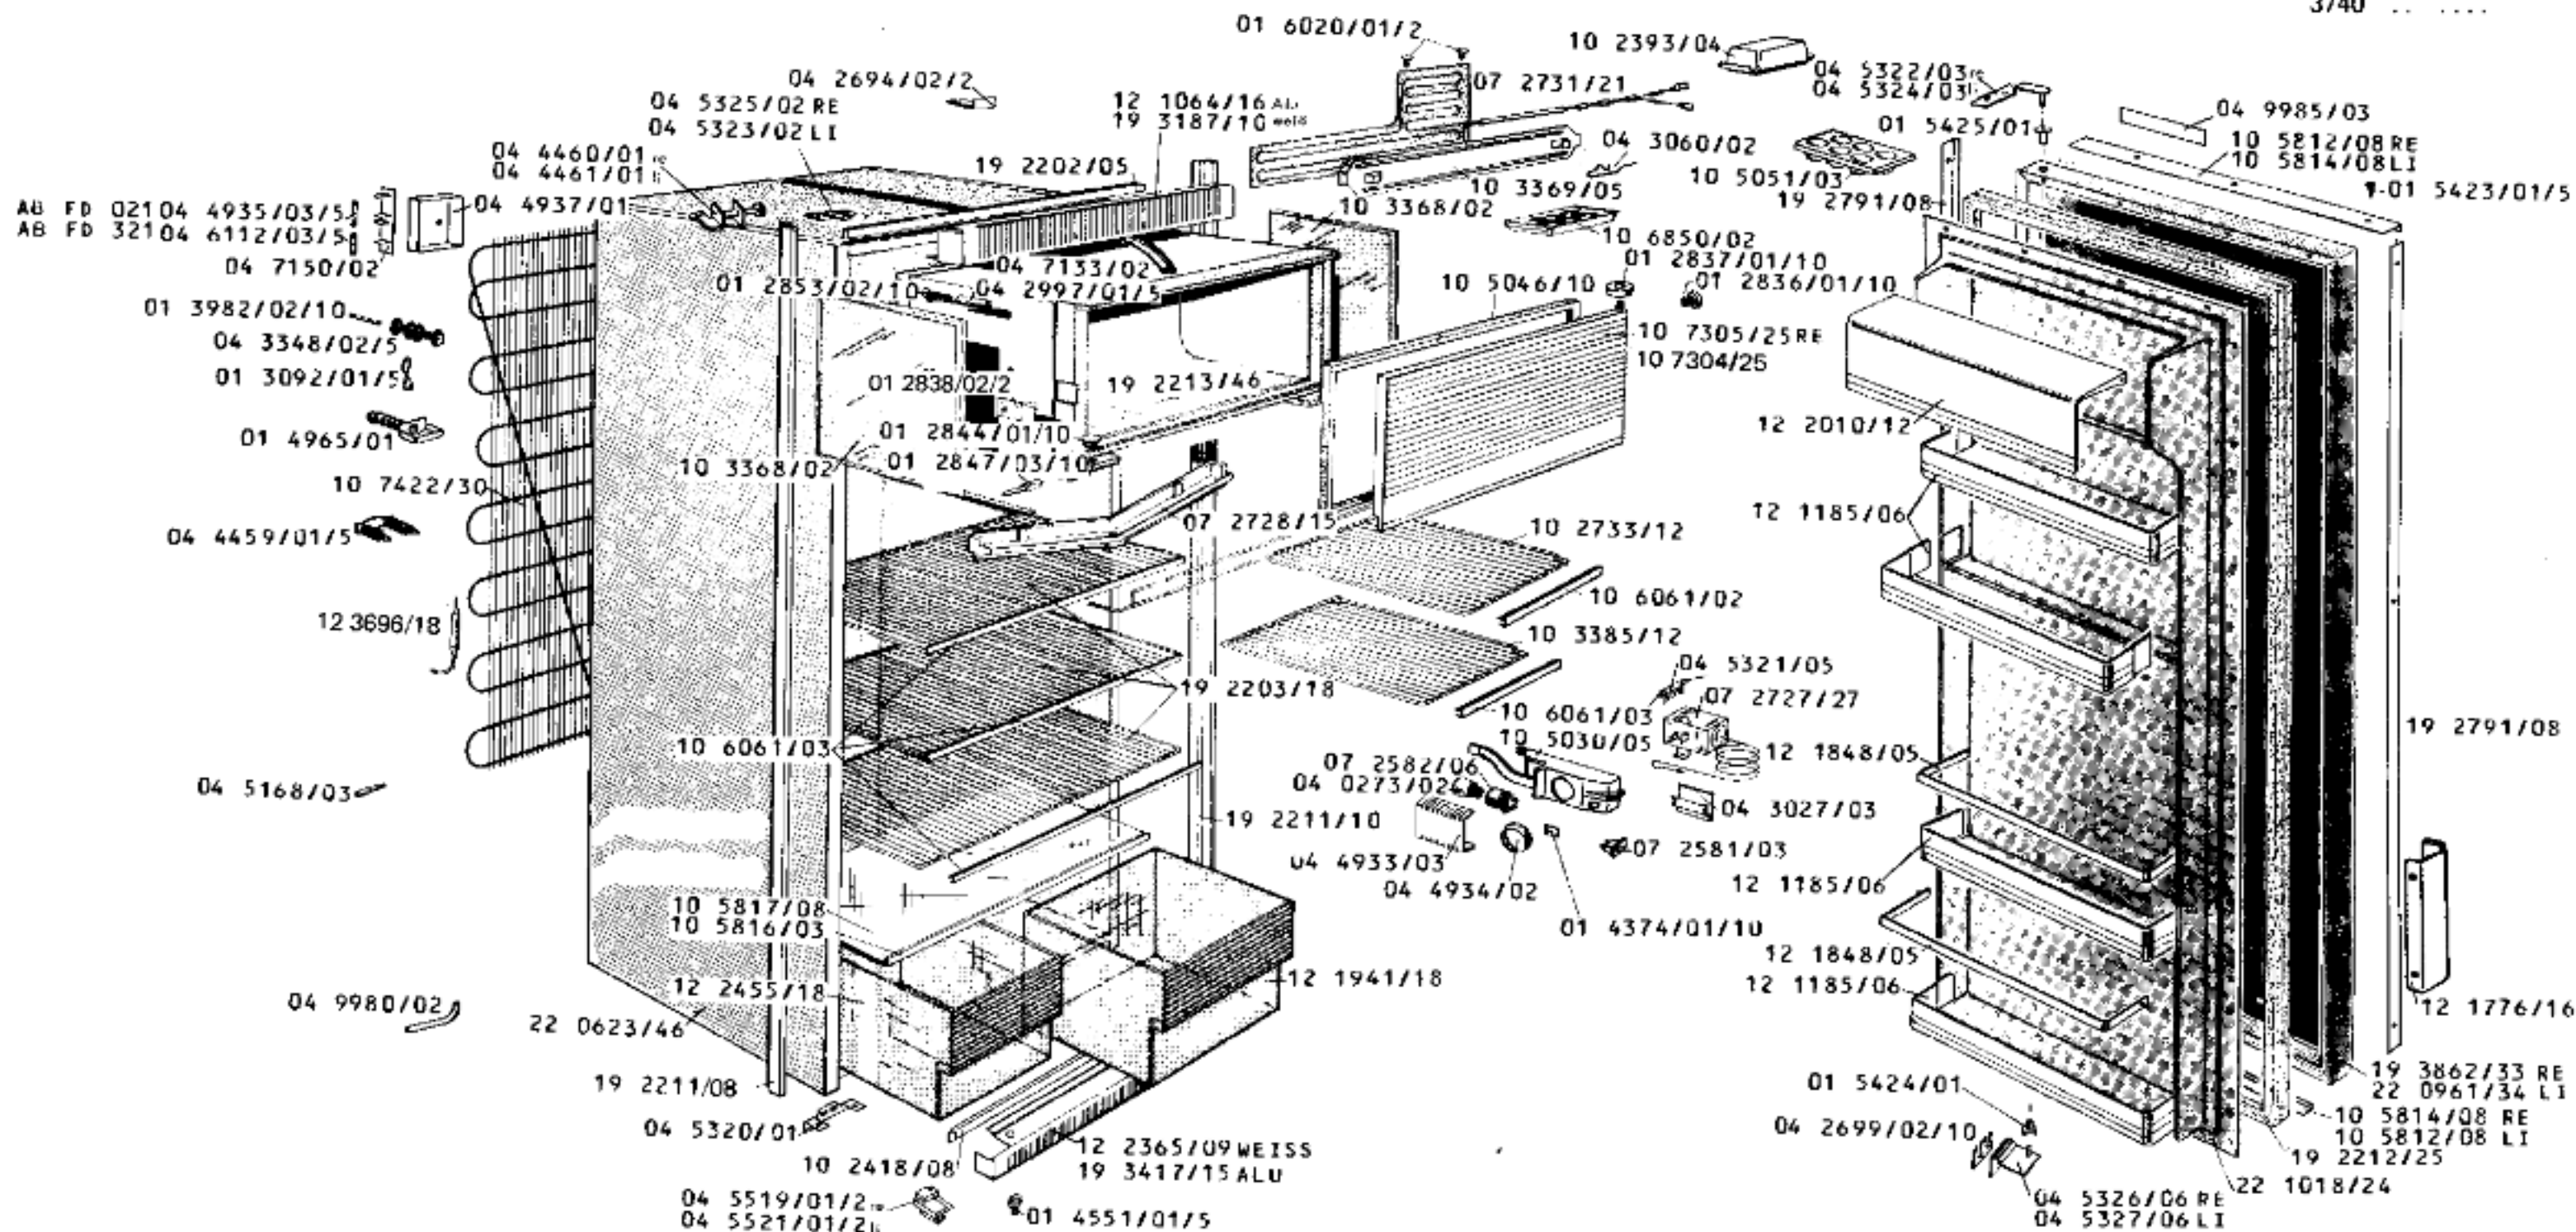

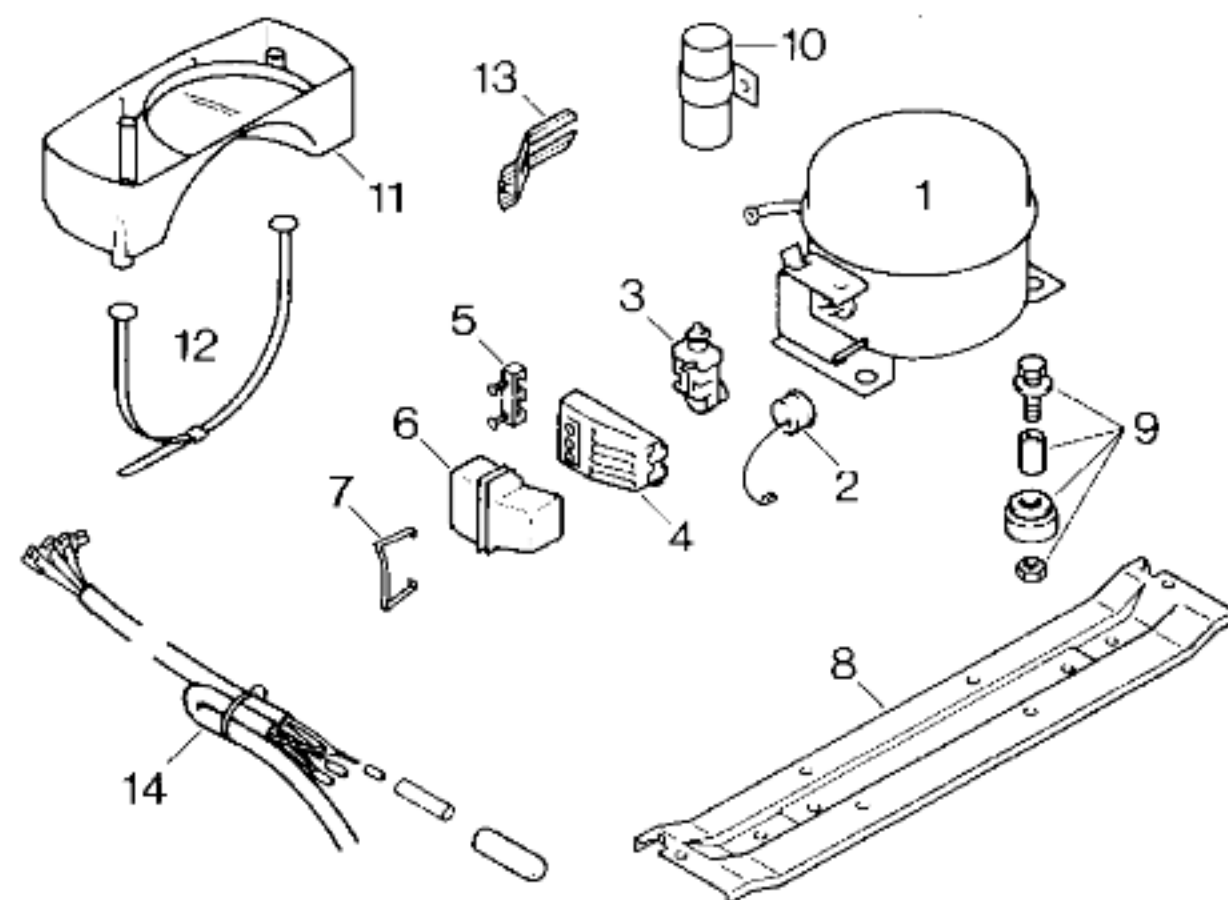

	D1-D5, F1, F2	D1-D5, F1, F2		
Pos.	SK1, SK2	SK1, SK2		
	Bosch	Danfoss		
1		14 0065/45		
2	07 2131/18			
3	07 2130/18	02 0108/26		
4	04 9757/02			
5		02 1361/04		
6	04 9758/02	05 1413/06		
7				
8		*11 1839/07		
9		*05 0166/05/4		
10				
11	10 6693/03	*11 1243/01		
12				
13		*04 1568/01/2		
14		*05 1226/08		

*1) Bei Ersatz des Bosch Verdichters mitbestellen
To be ordered when replacing the Bosch compressor
A commander lors du remplacement du compresseur Bosch

TECHNISCHE DATEN / TECHNICAL DATA / DONNÉES TECHNIQUES

Verdichter/Compressor/Compresseur		Bosch	Danfoss	Danfoss	
Typ/Type		V 1040	TL 5 A	PW 4,5 K 9	
Förderleistung/Delivery/Débit	l/h	1040	920	345	
Anlaufstrom/Starting current/Cour. de démarrage	A	9,5	9		
Widerstand/Resistance/Résistance	Hi/main/prin. Ω	15,0	15,7	11,5	
	Hi/aux Ω	29,5	18,8	44,3	
Temp.-Regler/Thermostat		Ranco			
Typ/Type		A 50			
Reglerstellung/Position		kalt warm			
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	+ 4 + 4			
Valeurs de commutation	„aus“	- 29 - 20			
(„abtauen“ od.)	„alarm“				
Füllmenge/Fill quantity/Charge	R12 g	130			
Anschlußwert/Conn. load/Puiss. connectée	W	115			
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance	Ω	3230			
Leistung/Power/Puissance	W	15			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance	Ω				
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance	Ω				
Spannung/Voltage/Tension	V				